

ARYAN CRANES
AND HEAVY EQUIPMENT W.L.L



**اريان للرافعات
والمعدات الثقيلة ذ.م.م**

SAC1100S

SANY All Terrain Crane
110 Tons Lifting Capacity



Max. Lifting Capacity: 110 t
Max. Boom Length: 63 m
Max. Lifting Height: 90.5 m

Efficient Power System

- ▶ The crane shares a dual power engine, with the energy saving enhancement of more than 10%, and the maintenance cost decrease of more than 35%;
- ▶ The carrier power is transmitted mechanically to superstructure. The structure is simple, safe and reliable, with low fault rate;
- ▶ Single-engine power system is adopted for weight reduction of the superstructure power system and enhancement of the load-bearing components, increasing crane lifting performance by 20%.

Excellent lifting performance

- ▶ 7-section telescoping boom with single cylinder pin. The total boom length is 63m, and jib length is 27.5m include 15.5m folding jib (standard) and 2*6m extension jib;
- ▶ Maximum lifting height is 90.5m and maximum working radius is 70m, ensuring a wider working range;
- ▶ Maximum lifting torque of basic boom is 4145KN.m, featuring superior lifting and loading performance.

Mobile and flexible carrier

- ▶ The crane is 14m long and 2.8m wide, with strong adaptability to construction site;
- ▶ 5-axle all-wheel steering and 8.5m minimum turning radius, ensuring flexible movement of the crane;
- ▶ With a powerful carrier, the maximum travel speed is 85km/h, and the maximum gradient can reach up to 60%;
- ▶ When travelling in the state of 60T, it can carry counterweight or parts to up 7.1t. Full counterweights could be carried 19.2t for short-distance movement.



Safe control system

- Equipped with an anti-tipping warning system, advance warning is issued through sound and light notice to ensure the safety of crane;
- Equipped with a voice alarm system, voice notices are issued for various movement to prevent mis-operation and ensure safety of personnel and operation;
- High-accuracy, high-stability, high-intelligence load moment limiter system is adopted for full protection of lifting and loading operation;
- The abundant sensors give timely feed back of data information and realize real-time monitoring.

Energy-saving hydraulic system

- The application of electrically controlled variable displacement pump, displacement and speed grade control technology increase working efficiency by 15%, while saving energy by 20%;
- With dual pump converging / diverging intelligent speed regulation technology, the dual pump supplies oil independently for compound movements, which ensures the stability and reliability of the movements with better micro-mobility. The various diverging distribution mode makes work freer and easier;
- The dual protection of winching, luffing, telescoping on the hydraulic circuit makes operation safer and more reliable.




04

SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Overall Dimensions

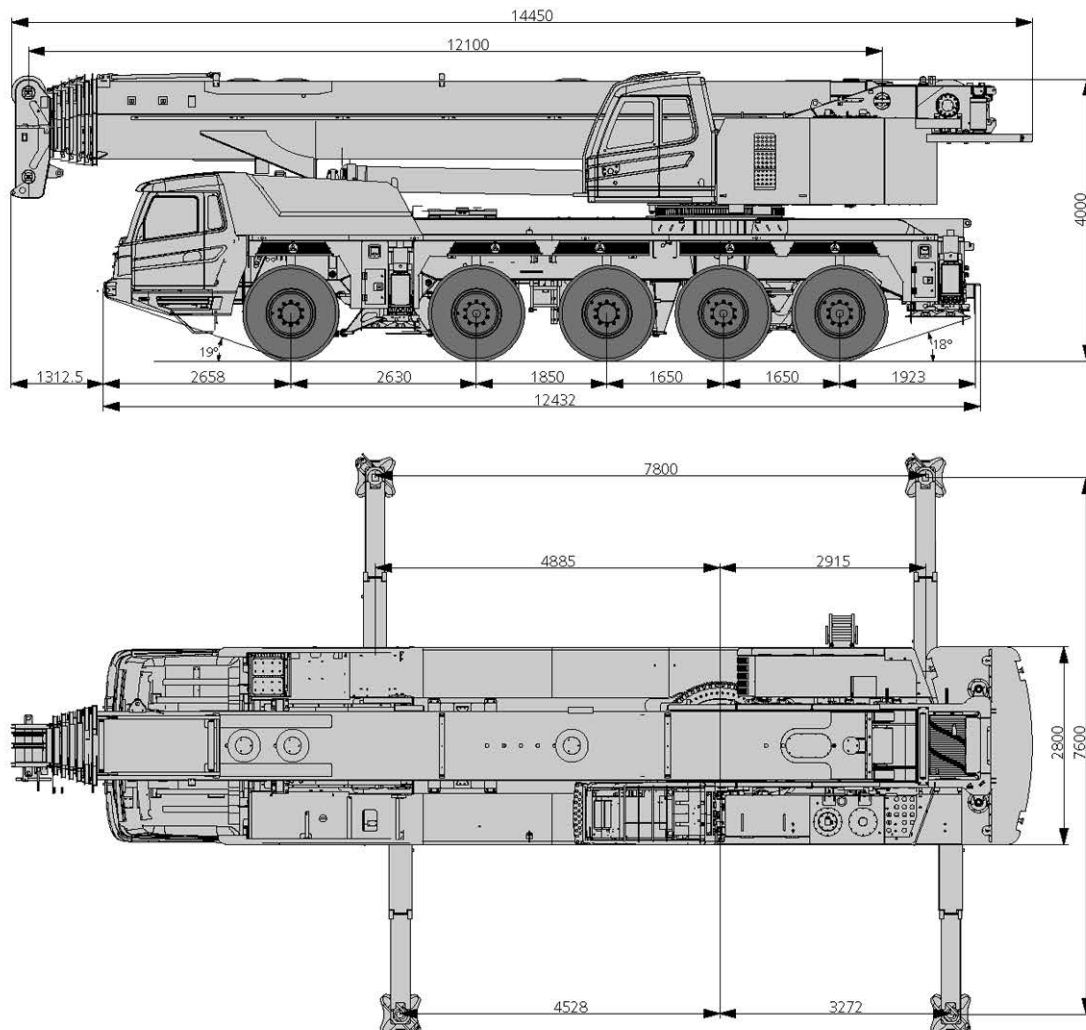

Quality Changes the World



Technical Parameters

Type	Item		Parameter
Dimensions	Total length of crane		14450 mm
	Total width of crane		2800 mm
	Total height of crane		4000 mm
Weight	Total weight of crane		54000 Kg
	Axle load	Load of axle 1, axle 2, axle 3	31300 kg
		Load of axle 4, axle 5	22700 kg
Power	Max. engine power		360/1800 kw(r/min)
	Max. engine output torque		2200/1300 N.m(r/min)
Travel	Max.traveling speed		85 km/h
	Turning radius	Min.turning radius	8.5 m
		Min.turning radius of boom head	11 m
	Drive/Steer		10 x 6 x 10
	Min.ground clearance		285 mm
	Approach angle		19 °
	Departure angle		18 °
	Max.gradeability		60%
Performance specifications	Fuel consumption per 100km		≤ 70 L
	Temperature range		- 20°C ~ + 40°C
	Min.rated range		3 m
	Tail slewing radius of swingtable		4.85 m
	Boom section		7
	Boom shape		U
	Max. Lifting torque	Base boom	4145 kN·m
		Full-extend boom	1890 kN·m
		Full-extend boom+jib	1350 kN·m
	Boom length	Base boom	12.1 m
		Full-extend boom	63 m
		Full-extend boom+jib	90.5 m
	Outrigger span (Longitudinal×Transversal)		7.8 × 7.6 m
	Jib offset		0°, 15°, 30°
Working speed	Max.single rope lifting speed of main winch (no load)		130 m/min
	Full extension/retraction time of boom		500/500 s
	Full lifting/descending time of boom		60/150 s
	Slewing speed		1.5 r/min



06 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Technical Parameters



Axle load

Item	1	2	3	4	5	Total weight
Axle load	12	12	12	12	12	60
Remarks	Including 2t fixed counterweight and 5.1t movable counterweight.					



Hook

Lifting capacity (t)	Pullies	Parts of line	Hook weight (kg)
100(optional)	5	11	1243
80	3	7	694
32(optional)	1	3	479
12.5	0	1	270



Gradient

Weight	Tire	Speed ratio of transfer gear	Ropes														Max. Gradient
			1	2	3	4	5	6	7	8	9	10	11	12	R1	R2	
60t	385/95R25	0.8	5.9	7.6	9.9	12.7	16.1	20.7	27.3	35.1	45.2	58.1	73.7	94.6	6.5	8.3	40%
60t	385/95R25	1.83	2.6	3.3	4.3	5.6	7	9	11.9	15.3	19.7	25.3	32.1	41.2	2.8	3.6	> 60%
60t	445/95R25	0.8	6.3	8.2	10.5	13.5	17.1	22	28.9	37.2	48	61.6	78.1	99.8	6.8	8.8	38%
60t	445/95R25	1.83	2.7	3.5	4.5	5.8	7.5	9.6	12.6	16.2	20.9	26.9	34	43.7	3	3.8	> 60%



Main movement parameters


Item	Maximum speed	Diameter / Length	Max. single line pull.
Main winch	130 m/min	22 mm/280 m	105 kN
Auxiliary winch	130 m/min	22 mm/190 m	105 kN

Quality Changes the World



Crane Introduction

No.	Name	Manufacture
1	Engine	Benz
2	Transmission	ZF
3	Axle	KESSLER
4	Tire	Techking
5	Piston pump	Rexroth
6	Winch motor	Kawasaki
7	Transfer box	Kessler

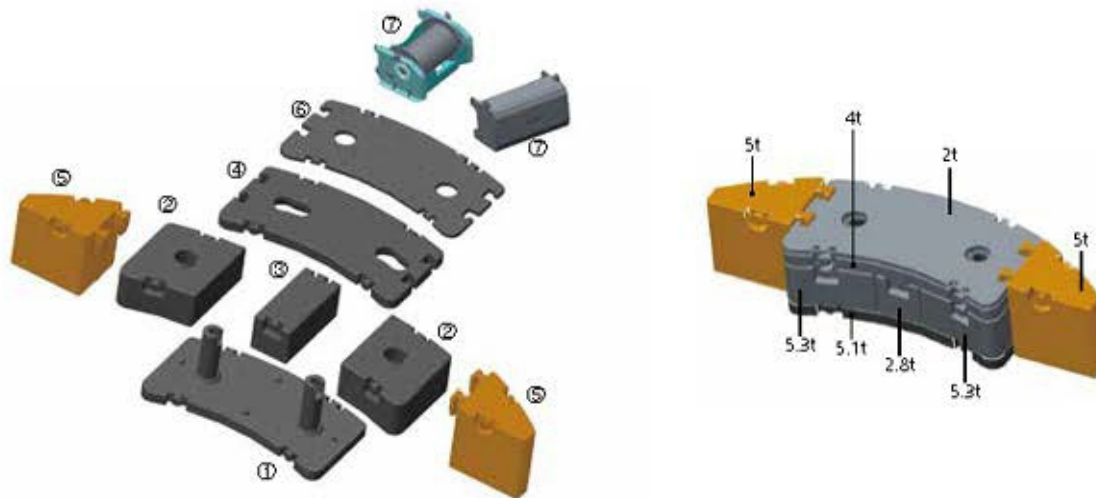

Counterweight	Mass(t)	Counterweight Combination	Mass(t)	Note
Movable Counterweight 1	5.1	⑥ + ⑦	3.5t	The total mass ≤ 60t
Movable Counterweight 2	5.3	① + ⑥ + ⑦	8.8t	-
Movable Counterweight 3	2.8	① + ② * 2 + ⑥ + ⑦	19.2t	Transition for short distance
Movable Counterweight 4	4	① + ② * 2 + ③ + ⑥ + ⑦	22t	-
Movable Counterweight 5	5	① + ② * 2 + ③ + ④ + ⑥ + ⑦	26t	-
Fixed Counterweight 6	2	① + ② * 2 + ③ + ④ + ⑤ * 2 + ⑥ + ⑦	36t	-
Movable Counterweight 7	1.5			



08

SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Crane Introduction

Driving cab

- The whole frame is made of corrosion-resistant steel sheets. The design of instrument panel in the cab meets the principle of ergonomics, and the cab is equipped with full coverage softening interior, large arc integral front window, electronic analog meter, radio / player device, air conditioner, etc.

Crane frame

- The crane frame is optimized with rectangular cross section, replacing the original concave cross section: 1. The resistance to bending and twisting is improved greatly. 2. Under the condition of the same flexural modulus, the weight of rectangular cross-section crane frame is smaller than the weight of concave cross-section crane frame. 3. The crane frame stability is improved.

Carrier engine

- Type: 6-cylinder inline;
- Emission: Europe III;
- Fuel tank capacity: 550L;
- Optional: Benz E3B (Europe V).

Crane axle

- Axle 1, single tire, steering axle;
- Axle 2, single tire, steering drive axle;
- Axle 3, single tire, steering axle;
- Axle 4, single tire, steering drive axle;
- Axle 5, single tire, steering drive axle.

Driving axle

- Steering drive axle: axle 2, axle 4 and axle 5.

Axle suspension

- All crane axle suspension devices are hydro-pneumatic suspension system.

Tire

- Super-level all-steel radial tire, featuring stronger bearing capacity and better wearing resistance. Tire model: 385/95R25.

Braking system

- The braking system includes service brake, parking brake, emergency brake and auxiliary brake;
- The service brake adopts the dual-circuit braking system. All wheels use the air servo brake, and are all installed with the disc brake;
- The parking brake is driven by the spring brake chamber and acts on axle 2 to axle 5;
- The emergency brake is driven by cutoff of the spring stored energy and concurrently serves as emergency brake;
- The auxiliary brake is composed of engine brake, exhaust brake and hydraulic retarder brake, guaranteeing the safety and reliability of traveling.

Steering system

- Six steering modes;
- Axle 1, and axle 2 adopts mechanical linkage hydraulic power steering, and the steering gear is dual-circuit servo power steering gear;
- Electro-hydraulic ratio control auxiliary steering is adopted for axle 3, axle 4 and axle 5.

Outrigger

- Made of high-strength steel sheet materials, front and rear telescoping outriggers are controlled through outrigger control panel with automatic leveling function and flexible operation;
- 4-point support, the transverse, longitudinal span is 7.8m×7.6m, with easy operation and strong stability.

Electrical equipment

- Independently researched and developed by Sany, SYMC, a special controller for engineering machinery is adopted;
- CAN bus all-digital network control technology is configured with abundant sensor parts, with stable control signal, simple wire harness and high reliability;
- With timely information feedback, the real-time monitoring on the crane working status is realized;
- Configured with the load moment limiter with a full-range intelligent protection system, its accuracy is within $\pm 5\%$. And the operation is safer and more reliable with comprehensive logical, interlocking control;
- Increased the precast cable wiring of superstructure, the protection for the machine would be more stable and reliable.

Quality Changes the World



Crane Introduction



Operating cab

- With the corrosion-resistant streamlined integral composite shell, it is configured with large arc integral front window, load moment limiter display, air conditioner, and the cab can tilt up to 20° on the whole to effectively relieve the fatigue;
- The adjustable back seat makes operation more comfortable;
- With a 10.4-inch large-screen TFT display, the working condition is clear at a glance;
- The console and the working condition display system are combined for convenient and efficient operation. Easy operation is achieved through electric control handle.



Boom system

- Boom: 12.1m-63m, 7 sections, made of high strength steel 960 sheets. The torque of Min. boom reaches 4145kN.m, and the torque of fully extended boom reaches 1890kN.m, with strong lifting capacity;
- The fully optimized U-shape large arc cross-section boom makes the boom carry weights more evenly, the boom of lighter weight improves safety significantly;
- The finite-element analysis is adopted for design of the boom to optimize the strength and rigidity of structural parts to the greatest extent in order to effectively improve the stress distribution and improve the safety;
- There are 6 kinds of jib length combinations, 9.4m, 15.4m, 15.5m, 21.4m, 21.5m, 27.5m, and the jib offset angle is 0°, 15°, 30°
- Telescoping mechanism: With advanced single cylinder pin telescoping technology, the boom length can be telescoped automatically according to the working condition, and the combination form of multiple boom lengths can be chosen. By simply inputting the lifting weight, working radius, working height, you can complete the lifting and loading operation prompted, which is convenient and efficient.



Lifting mechanism

- Standard hook: 12.5(ball hook), 80t dual hook; Optional: 32t, 100t dual hook.



Luffing mechanism

- With single luffing cylinder, the luffing mechanism uses the design software of three-connected joints to optimize the design of pin-connected points;
- The Max. luffing angle is 81°.



Swing mechanism

- Electric proportional pump control dual swing mechanism is adopted for stable movement, excellent speed control and low power consumption;
- Unique design of swing buffer makes braking more stable;
- High strength bolts are used to fix the carrier frame with outer ring and turntable with inner ring.



Swing bearing

- Manufactured by Sany Sauter, the swing bearing features strong bearing capacity.



Turntable structure

- The optimized turntable structure ensures enough rigidity and strength of the turntable.



Superstructure hydraulic system

- The main / auxiliary winch adopts electric proportional variable displacement motor, and the maximum speed is 130m/min;
- The winching, luffing, telescoping are set with dual protection on the hydraulic circuit, safer and more reliable;
- Sany patented dual pump converging intelligent speed control technology increases working efficiencies significantly;
- With dual pump converging / diverging intelligent speed regulation technology, the dual pump supplies oil independently for compound movements, which ensures the stability and reliability of the movements with better micro-mobility. The various diverging distribution mode makes work freer and easier.



Safety device

- With load moment limiter, electric proportional security key, height limiter, three-wrap protector, and combined modeling method of theoretical modeling and prototyping model correction, the modeling is closer to reality and the control is more accurate. The full-range protection of lifting and loading operation ensures accurate, smooth and comfortable operation. With abundant interface display, the display interface is customized, modified according to user needs.



Counterweight

- With lifting-type counterweight structure and remote controllable technology, the completion of counterweight assembly work by one person can be realized to further save manpower and shorten the preparation time before operation;
- Counterweight combination: 3.5t, 8.6t, 19.2t, 22t, 26t, 36t.




Optional

- Tire: 445R95;
- Drive: 10X8, optional drive for axle1;
- Hook: 32t, 100t(dual hook)
- Jib: There are two extended jib for 12m, each one is 6m;
- Auxiliary winch;
- Benz E3B(Europe V).



10 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Boom Operating Range

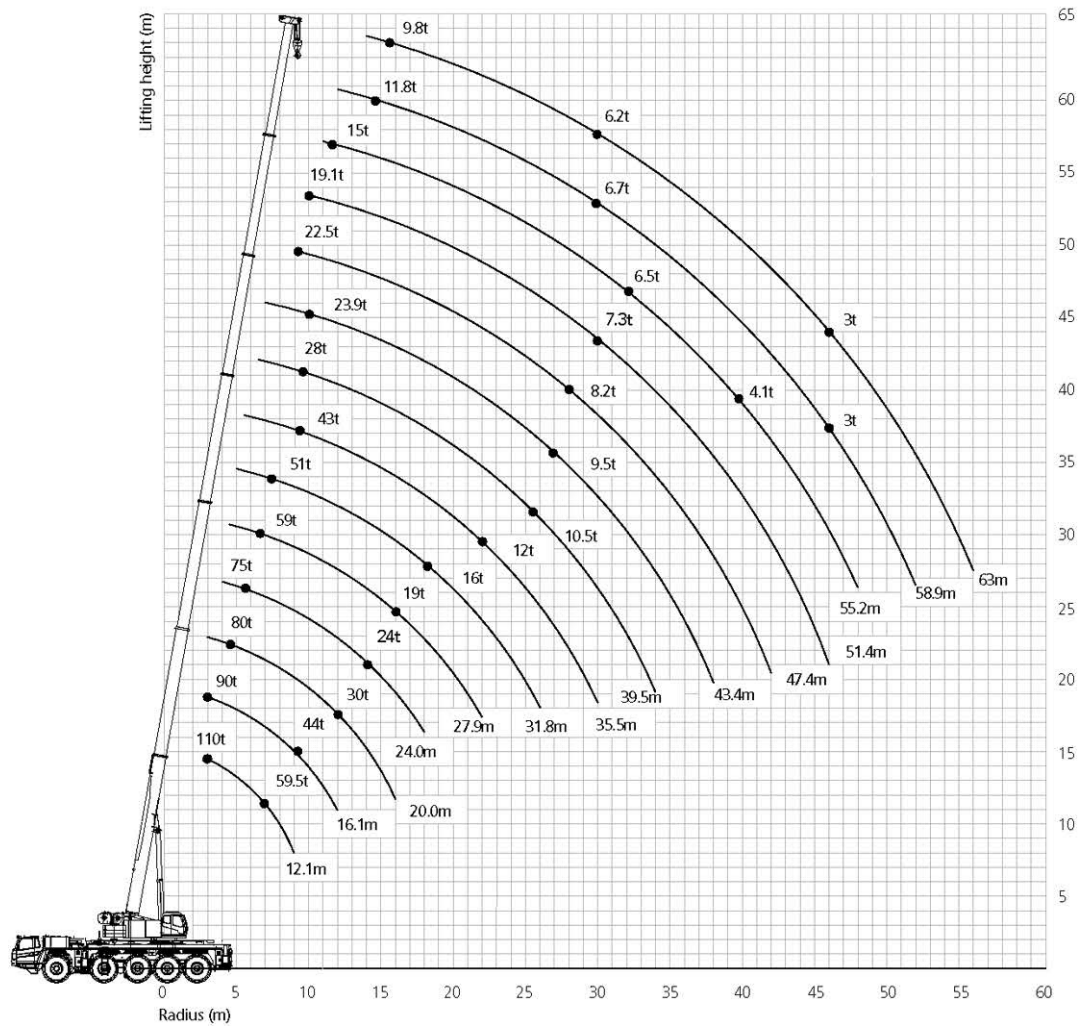

Quality Changes the World.



Load Chart - Telescopic Boom

Unit: t




Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	100.0	90.0	69.0	84.0	68.0												3.5
4.0	95.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	87.0	82.0	61.0	82.0	60.0	77.0	51.0	61.0	61.0	55.0							4.5
5.0	81.0	77.0	57.0	76.0	56.0	75.0	49.0	61.0	57.0	53.0	53.0	53.0					5.0
5.5	75.5	72.0	53.0	71.0	54.0	72.0	47.0	61.0	54.0	51.0	53.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	70.5	68.0	51.0	67.0	50.0	68.0	45.0	61.0	51.0	50.0	53.0	53.0	52.6	44.0	41.0	34.5	6.0
6.5	64.5	64.0	47.0	63.0	48.0	64.0	43.0	61.0	48.5	48.0	53.0	53.0	51.0	44.0	39.0	33.0	6.5
7.0	60.0	60.0	45.0	60.0	46.0	59.0	41.0	59.0	45.5	46.0	53.0	50.5	50.0	44.0	37.0	31.5	7.0
8.0	52.0	52.0	41.0	52.0	41.0	52.0	37.0	52.0	41.5	42.0	51.0	46.5	46.0	44.0	33.5	29.2	8.0
9.0	42.0	45.0	38.0	45.0	38.0	46.0	34.0	46.0	38.0	39.0	46.0	42.5	42.0	44.0	30.5	27.4	9.0
10.0		39.5	35.0	39.5	35.0	41.0	31.0	41.0	35.0	36.0	41.0	39.0	40.0	40.0	28.3	25.3	10.0
11.0		35.0	33.0	35.0	32.5	35.0	29.4	36.0	32.0	33.0	36.0	35.5	36.0	37.0	26.1	23.3	11.0
12.0		30.0	31.0	30.0	30.2	30.5	27.1	31.0	30.0	31.0	32.0	31.0	33.0	32.0	24.0	21.8	12.0
14.0				23.0	26.0	24.0	23.8	24.0	25.0	26.0	25.0	24.5	26.0	25.5	20.7	19.4	14.0
16.0				19.0	21.0	19.0	21.2	19.8	20.0	21.5	20.0	20.0	21.0	21.0	18.1	17.0	16.0
18.0						16.0	18.4	16.4	17.1	18.3	16.9	16.6	18.0	17.5	15.8	15.4	18.0
20.0								13.8	14.5	15.6	14.3	14.0	15.3	14.8	14.1	14.0	20.0
22.0								11.8	12.4	13.6	12.3	12.0	13.2	12.8	12.8	12.7	22.0
24.0											10.6	10.3	11.6	11.1	11.2	11.5	24.0
26.0											9.2	9.0	10.2	9.7	9.8	10.4	26.0
28.0														8.6	8.7	9.3	28.0
30.0														7.6	7.7	8.3	30.0
32.0																	32.0
34.0																	34.0
36.0																	36.0
38.0																	38.0
40.0																	40.0
42.0																	42.0
44.0																	44.0
46.0																	46.0
48.0																	48.0
50.0																	50.0
52.0																	52.0
54.0																	54.0
56.0																	56.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



12 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	27.0												7.0
8.0	32.0	31.0	26.8	27.0	26.0	26.1											8.0
9.0	29.9	29.0	25.1	26.0	25.5	24.4	23.0	22.2	20.3								9.0
10.0	27.6	26.8	23.5	24.6	24.4	22.9	22.0	21.0	19.3	20.1	19.5	16.4					10.0
11.0	25.6	25.0	22.1	23.1	22.5	21.5	20.6	19.7	18.3	19.1	19.0	15.6					11.0
12.0	24.0	23.0	20.9	21.7	21.1	20.5	19.4	18.6	17.4	18.1	18.0	14.9	15.3	13.8			12.0
14.0	20.7	20.3	18.6	19.3	18.6	18.0	17.3	16.6	15.6	16.4	16.0	13.5	14.0	12.6	12.0		14.0
16.0	18.4	18.0	16.9	16.9	16.5	16.3	15.4	14.8	13.9	14.6	14.5	12.2	12.9	11.6	11.1	9.8	16.0
18.0	16.4	15.9	15.3	15.3	14.7	14.5	14.0	13.4	12.6	13.2	13.0	11.3	11.7	10.7	10.4	9.3	18.0
20.0	13.8	14.4	14.1	13.6	13.1	13.2	12.4	12.1	11.4	12.0	11.7	10.4	10.7	9.9	9.6	8.7	20.0
22.0	11.7	12.3	12.8	11.9	11.9	11.9	11.3	10.8	10.3	11.1	10.8	9.6	9.9	9.1	9.0	8.2	22.0
24.0	10.1	10.6	11.4	10.2	10.6	10.8	10.2	9.8	9.4	10.0	9.7	8.8	9.0	8.5	8.4	7.7	24.0
26.0	8.7	9.2	10.0	8.8	9.2	9.7	9.3	9.0	8.6	9.1	8.8	8.1	8.3	7.9	7.8	7.2	26.0
28.0	7.6	8.1	8.8	7.7	8.0	8.6	8.1	8.2	7.8	8.3	8.1	7.5	7.6	7.4	7.2	6.7	28.0
30.0	6.6	7.1	7.9	6.7	7.0	7.6	7.1	7.5	7.2	7.3	7.4	6.9	7.0	6.9	6.8	6.3	30.0
32.0	5.8	6.3	7.0	5.9	6.2	6.7	6.3	6.6	6.6	6.5	6.5	6.5	6.6	6.4	6.4	5.8	32.0
34.0	5.1	5.6	6.3	5.1	5.5	6.0	5.6	5.9	6.1	5.7	5.8	6.0	6.0	6.0	5.9	5.4	34.0
36.0				4.5	4.8	5.4	4.9	5.3	5.6	5.1	5.1	5.6	5.3	5.5	5.5	5.1	36.0
38.0				3.9	4.2	4.8	4.3	4.7	5.3	4.4	4.5	5.2	4.8	5.2	5.0	4.8	38.0
40.0							3.8	4.2	4.8	3.9	4.0	4.8	4.2	4.7	4.5	4.5	40.0
42.0							3.3	3.7	4.3	3.4	3.5	4.5	3.7	4.3	4.0	4.0	42.0
44.0										2.9	3.0	4.2	3.3	3.9	3.5	3.5	44.0
46.0										2.5	2.6	3.8	2.8	3.5	3.1	3.1	46.0
48.0													2.5	3.1	2.7	2.7	48.0
50.0															2.4	2.4	50.0
52.0															2.1	2.1	52.0
54.0																1.8	54.0
56.0																1.5	56.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t




Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	95.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	87.0	82.0	61.0	82.0	60.0	77.0	51.0	61.0	61.0	55.0							4.5
5.0	80.0	77.0	57.0	76.0	56.0	75.0	49.0	61.0	57.0	53.0	53.0	53.0					5.0
5.5	73.0	72.0	53.0	71.0	54.0	72.0	47.0	61.0	54.0	51.0	53.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	66.0	66.0	51.0	65.0	50.0	67.0	45.0	61.0	51.0	50.0	53.0	53.0	52.6	44.0	41.0	34.5	6.0
6.5	60.0	61.0	47.0	60.0	48.0	62.0	43.0	61.0	48.5	48.0	53.0	53.0	51.0	44.0	39.0	33.0	6.5
7.0	55.0	56.0	45.0	56.0	46.0	56.0	41.0	57.0	45.5	46.0	53.0	50.5	50.0	44.0	37.0	31.5	7.0
8.0	47.0	48.0	41.0	49.0	41.0	48.0	37.0	49.0	41.5	42.0	50.0	46.5	46.0	44.0	33.0	29.2	8.0
9.0	40.0	40.0	38.0	40.5	38.0	41.0	34.0	42.0	38.0	39.0	42.0	42.0	42.0	43.0	30.0	27.4	9.0
10.0		34.0	35.0	34.0	35.0	34.0	31.0	35.0	35.0	36.0	35.0	35.0	37.0	36.0	28.3	25.3	10.0
11.0		28.5	31.0	28.5	31.0	29.0	29.4	29.5	30.0	32.0	30.0	30.0	31.5	31.0	26.1	23.3	11.0
12.0		24.5	27.0	24.5	27.0	25.0	27.1	25.5	26.0	28.0	26.0	26.0	27.5	27.0	24.0	21.8	12.0
14.0				19.2	21.0	19.5	22.0	20.0	20.0	22.0	20.0	20.0	21.5	21.0	20.7	19.4	14.0
16.0				15.3	17.5	15.6	18.1	16.1	16.8	18.0	16.6	16.3	17.7	17.2	17.3	17.0	16.0
18.0						12.7	15.2	13.2	13.8	15.0	13.7	13.4	14.7	14.2	14.3	15.0	18.0
20.0								10.9	11.6	12.8	11.4	11.1	12.4	12.0	12.1	12.7	20.0
22.0								9.2	9.9	11.0			9.7	9.4	10.7	10.2	22.0
24.0											8.3	8.0	9.2	8.8	8.9	9.5	24.0
26.0											7.1	6.8	8.1	7.6	7.7	8.3	26.0
28.0														6.6	6.7	7.3	28.0
30.0														5.8	5.9	6.5	30.0
32.0																	32.0
34.0																	34.0
36.0																	36.0
38.0																	38.0
40.0																	40.0
42.0																	42.0
44.0																	44.0
46.0																	46.0
48.0																	48.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



14 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	27.0												7.0
8.0	32.0	31.0	26.8	27.0	26.0	26.0											8.0
9.0	29.9	29.0	25.1	26.0	25.5	24.4	23.0	22.2	20.3								9.0
10.0	27.6	26.8	23.5	24.6	24.4	22.9	22.0	21.0	19.3	20.1	19.5	16.4					10.0
11.0	25.6	25.0	22.1	23.1	22.5	21.5	20.6	19.7	18.3	19.1	19.0	15.6					11.0
12.0	24.0	23.0	20.9	21.7	21.1	20.5	19.4	18.6	17.4	18.1	18.0	14.9	15.3	13.8			12.0
14.0	20.0	20.3	18.6	19.3	18.6	18.0	17.3	16.6	15.6	16.4	16.0	13.5	14.0	12.6	12.0		14.0
16.0	16.1	16.7	16.9	16.3	16.5	16.3	15.4	14.8	13.9	14.6	14.5	12.2	12.9	11.6	11.1	9.8	16.0
18.0	13.2	13.8	14.6	13.4	13.7	14.3	13.9	13.4	12.6	13.2	13.0	11.3	11.7	10.7	10.4	9.3	18.0
20.0	10.9	11.5	12.3	11.1	11.5	12.0	11.6	12.0	11.4	11.8	11.7	10.4	10.7	9.9	9.6	8.7	20.0
22.0	9.2	9.7	10.5	9.3	9.7	10.3	9.8	10.2	10.3	10.0	10.1	9.6	9.9	9.1	9.0	8.2	22.0
24.0	7.7	8.3	9.1	7.9	8.2	8.8	8.4	8.7	9.4	8.6	8.6	8.8	8.8	8.5	8.4	7.7	24.0
26.0	6.6	7.1	7.9	6.7	7.1	7.6	7.2	7.5	8.2	7.4	7.4	8.1	7.6	7.9	7.8	7.2	26.0
28.0	5.6	6.1	6.9	5.7	6.1	6.6	6.2	6.5	7.2	6.4	6.4	7.5	6.6	7.2	6.9	6.7	28.0
30.0	4.8	5.3	6.1	4.9	5.2	5.8	5.3	5.7	6.3	5.5	5.6	6.6	5.8	6.3	6.0	6.0	30.0
32.0	4.0	4.6	5.3	4.1	4.5	5.1	4.6	5.0	5.6	4.8	4.8	5.9	5.0	5.6	5.3	5.3	32.0
34.0	3.3	3.9	4.7	3.4	3.8	4.4	3.9	4.3	4.9	4.0	4.1	5.2	4.4	4.9	4.6	4.6	34.0
36.0				2.8	3.1	3.9	3.2	3.7	4.4	3.4	3.5	4.7	3.8	4.3	4.1	4.1	36.0
38.0				2.3	2.6	3.3	2.7	3.2	3.9	2.9	2.9	4.2	3.2	3.8	3.5	3.5	38.0
40.0							2.2	2.7	3.4	2.4	2.4	3.7	2.8	3.3	3.0	3.0	40.0
42.0							1.8	2.3	3.0	1.9	2.0	3.3	2.3	2.9	2.5	2.5	42.0
44.0										1.6	1.6	2.9	1.9	2.5	2.1	2.1	44.0
46.0										1.2	1.3	2.5	1.6	2.1	1.8	1.8	46.0
48.0														1.8	1.5	1.5	48.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t




Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	95.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	86.0	82.0	61.0	82.0	60.0	77.0	51.0	61.0	61.0	55.0							4.5
5.0	78.0	77.0	57.0	76.0	56.0	75.0	49.0	61.0	57.0	53.0	53.0	53.0	53.0				5.0
5.5	70.0	69.0	53.0	70.0	54.0	70.0	47.0	61.0	54.0	51.0	53.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	63.0	64.0	51.0	63.0	50.0	64.0	45.0	61.0	51.0	50.0	53.0	53.0	52.6	44.0	41.0	34.5	6.0
6.5	57.0	58.0	47.0	57.0	48.0	58.0	43.0	59.0	48.5	48.0	53.0	53.0	51.0	44.0	39.0	33.0	6.5
7.0	52.0	53.0	45.0	52.0	46.0	53.0	41.0	54.0	45.5	46.0	53.0	50.5	50.0	44.0	37.0	31.5	7.0
8.0	44.0	45.0	41.0	44.0	41.0	45.0	37.0	46.0	41.5	42.0	47.0	46.5	46.0	44.0	33.0	29.2	8.0
9.0	38.0	39.0	38.0	38.0	38.0	39.0	34.0	39.5	38.0	39.0	40.0	41.5	42.0	40.0	30.0	27.4	9.0
10.0		33.0	35.0	33.0	35.0	33.0	31.0	34.0	35.0	36.0	35.0	35.0	36.5	35.0	28.3	25.3	10.0
11.0		27.6	30.0	27.6	30.0	28.1	29.4	28.9	30.0	31.0	29.6	29.4	31.0	30.0	26.1	23.3	11.0
12.0		23.4	25.7	23.4	26.2	23.8	27.0	24.5	25.6	27.0	25.3	25.1	26.6	26.0	24.0	21.8	12.0
14.0				17.5	20.1	17.8	20.8	18.5	19.5	20.7	19.1	19.0	20.4	19.8	20.1	19.4	14.0
16.0				13.5	16.0	13.8	16.7	14.5	15.4	16.6	15.1	14.9	16.2	15.7	16.0	16.7	16.0
18.0						11.0	13.7	11.6	12.5	13.6	12.1	12.0	13.3	12.7	13.0	13.7	18.0
20.0								9.4	10.3	11.4	10.0	9.8	11.1	10.5	10.8	11.5	20.0
22.0								7.7	8.6	9.7	8.2	8.1	9.3	8.8	9.1	9.8	22.0
24.0											6.8	6.6	8.0	7.4	7.7	8.4	24.0
26.0											5.7	5.5	6.8	6.2	6.5	7.2	26.0
28.0														5.3	5.5	6.3	28.0
30.0														4.4	4.7	5.4	30.0
32.0																	32.0
34.0																	34.0
36.0																	36.0
38.0																	38.0
40.0																	40.0
42.0																	42.0
44.0																	44.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



16 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	27.0												7.0
8.0	32.0	31.0	26.8	27.0	26.0	26.0											8.0
9.0	29.9	29.0	25.1	26.0	25.5	24.4	23.0	22.2	20.3								9.0
10.0	27.6	26.8	23.5	24.6	24.4	22.9	22.0	21.0	19.3	20.1	19.5	16.4					10.0
11.0	25.6	25.0	22.1	23.1	22.5	21.5	20.6	19.7	18.3	19.1	19.0	15.6					11.0
12.0	24.0	23.0	20.9	21.7	21.1	20.5	19.4	18.6	17.4	18.1	18.0	14.9	15.3	13.8			12.0
14.0	18.7	19.4	18.6	18.9	18.6	18.0	17.3	16.6	15.6	16.4	16.0	13.5	14.0	12.6	12.0		14.0
16.0	14.6	15.3	16.3	14.8	15.2	16.0	15.3	14.8	13.9	14.6	14.5	12.2	12.9	11.6	11.1	9.8	16.0
18.0	11.7	12.4	13.3	11.9	12.3	13.0	12.3	12.8	12.6	12.4	12.5	11.3	11.7	10.7	10.4	9.3	18.0
20.0	9.5	10.2	11.0	9.7	10.1	10.8	10.1	10.6	11.3	10.2	10.3	10.4	10.7	9.9	9.6	8.7	20.0
22.0	7.8	8.4	9.3	8.0	8.4	9.0	8.4	8.8	9.5	8.5	8.6	9.6	8.9	9.1	9.0	8.2	22.0
24.0	6.3	7.0	7.9	6.5	6.9	7.6	7.0	7.4	8.1	7.1	7.1	8.4	7.5	8.1	7.8	7.7	24.0
26.0	5.1	5.8	6.8	5.3	5.7	6.4	5.8	6.2	7.0	5.9	5.9	7.2	6.3	7.0	6.6	6.6	26.0
28.0	4.2	4.8	5.8	4.3	4.7	5.4	4.8	5.2	6.0	4.9	4.9	6.3	5.3	6.0	5.6	5.6	28.0
30.0	3.3	4.0	4.9	3.5	3.9	4.6	3.9	4.4	5.1	4.0	4.1	5.4	4.5	5.1	4.7	4.8	30.0
32.0	2.6	3.3	4.2	2.8	3.2	3.8	3.2	3.7	4.4	3.3	3.4	4.7	3.7	4.4	4.0	4.1	32.0
34.0	2.0	2.7	3.6	2.2	2.6	3.2	2.6	3.0	3.8	2.7	2.8	4.0	3.1	3.7	3.4	3.5	34.0
36.0				1.6	2.0	2.7	2.0	2.5	3.2	2.1	2.2	3.5	2.5	3.2	2.8	2.9	36.0
38.0					1.5	2.2	1.6	2.0	2.7	1.6	1.7	3.0	2.1	2.7	2.3	2.4	38.0
40.0								1.6	2.3			2.6	1.6	2.2	1.9	2.0	40.0
42.0								1.2	2.0			2.2		1.9	1.5	1.6	42.0
44.0												1.8		1.5			44.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t



Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	93.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	83.0	82.0	61.0	81.0	60.0	77.0	51.0	61.0	61.0	55.0							4.5
5.0	74.0	73.0	57.0	74.0	56.0	73.0	49.0	61.0	57.0	53.0	53.0	53.0	53.0				5.0
5.5	66.5	65.0	53.0	66.0	54.0	67.0	47.0	61.0	54.0	51.0	53.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	60.0	58.5	51.0	59.0	50.0	60.0	45.0	57.0	51.0	50.0	53.0	53.0	52.6	44.0	41.0	34.0	6.0
6.5	54.5	53.0	47.0	53.0	48.0	54.0	43.0	54.0	48.5	48.0	53.0	53.0	51.0	44.0	39.0	33.0	6.5
7.0	49.5	48.5	45.0	48.5	46.0	49.0	41.0	49.0	45.5	46.0	50.0	50.5	50.0	44.0	37.0	31.0	7.0
8.0	42.0	41.0	41.0	41.0	41.0	41.0	37.0	41.0	41.5	42.0	42.0	43.0	44.0	41.0	33.0	29.2	8.0
9.0	33.0	32.0	35.0	32.0	35.0	32.0	34.0	33.0	35.0	36.5	34.0	34.0	36.0	35.0	30.0	27.4	9.0
10.0		25.8	28.5	25.9	29.1	26.4	30.0	27.2	28.4	30.0	28.0	27.8	29.5	28.9	28.3	25.3	10.0
11.0		21.3	23.7	21.3	24.3	21.8	25.2	22.5	23.7	25.1	23.3	23.1	24.7	24.1	24.4	23.3	11.0
12.0		17.8	20.2	17.8	20.7	18.3	21.5	19.0	20.1	21.5	19.7	19.5	21.1	20.4	20.8	21.6	12.0
14.0				13.0	15.6	13.4	16.4	14.0	15.1	16.3	14.7	14.5	15.9	15.4	15.7	16.5	14.0
16.0				9.8	12.3	10.1	13.0	10.7	11.7	12.9	11.3	11.2	12.5	12.0	12.3	13.0	16.0
18.0						7.7	10.5	8.3	9.3	10.4	9.0	8.8	10.1	9.6	9.8	10.5	18.0
20.0								6.5	7.5	8.6	7.1	6.9	8.3	7.7	8.0	8.7	20.0
22.0								5.0	6.0	7.2	5.6	5.4	6.8	6.2	6.5	7.3	22.0
24.0											4.4	4.3	5.6	5.0	5.3	6.1	24.0
26.0											3.5	3.3	4.7	4.1	4.4	5.1	26.0
28.0														3.3	3.6	4.3	28.0
30.0														2.6	2.9	3.6	30.0
32.0																	32.0
34.0																	34.0
36.0																	36.0
38.0																	38.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



18 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	27.0												7.0
8.0	32.0	31.0	26.8	27.0	26.0	26.0											8.0
9.0	29.9	29.0	25.1	26.0	25.5	24.4	23.0	22.2	20.3								9.0
10.0	27.6	26.8	23.5	24.6	24.4	22.9	22.0	21.0	19.3	20.1	19.5	16.4					10.0
11.0	22.8	23.6	22.1	23.1	22.5	21.5	20.6	19.7	18.3	19.1	19.0	15.6					11.0
12.0	19.2	20.0	20.9	19.5	20.0	20.5	18.4	18.6	17.4	17.1	17.0	14.9	15.3	13.8			12.0
14.0	14.3	15.0	16.0	14.5	14.9	15.7	15.0	15.5	15.6	15.1	15.2	13.5	14.0	12.6	12.0		14.0
16.0	10.9	11.6	12.5	11.1	11.5	12.2	11.6	12.1	12.8	11.7	11.8	12.2	12.2	11.6	11.1	9.8	16.0
18.0	8.5	9.2	10.1	8.7	9.1	9.8	9.2	9.6	10.4	9.3	9.3	10.6	9.7	10.4	10.4	9.3	18.0
20.0	6.6	7.3	8.2	6.8	7.2	8.0	7.3	7.8	8.5	7.4	7.5	8.8	7.9	8.5	8.2	8.2	20.0
22.0	5.1	5.8	6.8	5.3	5.7	6.5	5.8	6.3	7.1	5.9	6.0	7.3	6.4	7.1	6.7	6.7	22.0
24.0	3.9	4.6	5.6	4.1	4.5	5.3	4.6	5.1	5.8	4.7	4.8	6.1	5.2	5.8	5.5	5.5	24.0
26.0	3.0	3.6	4.6	3.1	3.6	4.3	3.6	4.1	4.8	3.7	3.8	5.1	4.2	4.8	4.5	4.5	26.0
28.0	2.2	2.8	3.8	2.3	2.7	3.4	2.8	3.2	4.0	2.9	3.0	4.3	3.3	4.0	3.6	3.7	28.0
30.0	1.5	2.2	3.1	1.7	2.1	2.7	2.1	2.5	3.3	2.2	2.3	3.6	2.6	3.3	2.9	3.0	30.0
32.0		1.6	2.5		1.5	2.1	1.5	2.0	2.7	1.6	1.7	3.0	2.0	2.7	2.3	2.4	32.0
34.0			2.0			1.6		1.4	2.2			2.4	1.5	2.1	1.8	1.9	34.0
36.0						1.2		1.0	1.7			2.0		1.7	1.3	1.4	36.0
38.0									1.3			1.6					38.0
Rope rate	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Rope rate
Boom II	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom II
Boom III	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom IV
Boom V	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t




Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	86.0	85.0	65.0	80.0	64.0	77.0	54.0										4.0
4.5	75.0	76.0	61.0	74.0	60.0	71.0	51.0	61.0	61.0	55.0							4.5
5.0	66.0	68.0	57.0	67.0	56.0	65.0	49.0	57.0	57.0	53.0	53.0	53.0	53.0				5.0
5.5	59.0	60.0	53.0	60.0	54.0	58.0	47.0	53.0	54.0	51.0	51.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	54.2	53.9	51.0	54.0	50.0	52.6	45.0	48.0	51.0	50.0	48.0	53.0	52.6	42.0	41.0	34.0	6.0
6.5	49.2	48.0	46.0	48.0	45.0	45.8	42.0	44.9	48.5	48.0	42.0	53.0	51.0	39.0	39.0	33.0	6.5
7.0	43.3	42.3	41.8	42.3	40.0	39.1	38.0	39.1	45.0	46.0	37.5	44.0	46.0	35.0	37.0	31.0	7.0
8.0	32.1	31.6	33.8	31.7	34.4	31.9	32.9	32.8	34.1	35.8	32.9	33.9	35.8	32.8	33.0	29.2	8.0
9.0	25.2	24.2	27.0	24.2	27.6	24.7	28.2	25.6	27.0	28.7	26.5	26.2	28.2	27.4	26.8	26.4	9.0
10.0		19.1	21.7	19.1	22.3	19.6	23.2	20.4	21.7	23.2	21.3	21.0	22.8	22.1	22.3	22.5	10.0
11.0			17.9	15.5	18.4	15.9	19.3	16.7	17.9	19.3	17.5	17.3	18.9	18.2	18.6	19.2	11.0
12.0			15.1	12.7	15.6	13.2	16.4	13.9	15.0	16.4	14.6	14.4	16.0	15.3	15.7	16.5	12.0
14.0				8.8	11.5	9.3	12.3	9.9	11.0	12.2	10.6	10.4	11.8	11.3	11.6	12.4	14.0
16.0				6.1	8.9	6.5	9.5	7.2	8.2	9.5	7.9	7.7	9.1	8.6	8.9	9.6	16.0
18.0						4.6	7.6	5.2	6.2	7.5	5.8	5.6	7.1	6.5	6.8	7.6	18.0
20.0								3.7	4.7	5.9	4.3	4.1	5.5	4.9	5.3	6.0	20.0
22.0								2.6	3.6	4.8	3.2	3.0	4.4	3.8	4.1	4.9	22.0
24.0											2.0	1.9	3.3	2.8	3.1	3.9	24.0
26.0													2.5	2.1	2.4	3.1	26.0
28.0															1.7	2.4	28.0
30.0																1.8	30.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



20 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	26.0												7.0
8.0	30.0	30.0	26.8	27.0	26.0	26.0											8.0
9.0	25.3	25.8	25.1	23.6	24.2	24.4	23.0	22.2	20.3								9.0
10.0	20.7	21.3	21.7	20.5	20.1	21.1	20.2	20.8	19.3	20.1	19.5	16.4					10.0
11.0	17.0	17.8	18.4	17.2	16.5	17.4	16.6	17.1	18.1	16.7	16.8	15.6					11.0
12.0	14.1	14.9	15.9	14.4	14.9	15.6	14.7	15.1	15.6	14.5	14.6	14.0	14.6	13.8			12.0
14.0	10.2	10.9	11.9	10.4	10.8	11.6	10.9	11.4	12.0	11.0	11.1	11.9	11.2	11.5	11.1		14.0
16.0	7.4	8.1	9.1	7.6	8.1	8.8	8.1	8.6	9.4	8.2	8.3	9.5	8.7	9.2	8.8	8.5	16.0
18.0	5.4	6.1	7.1	5.6	6.0	6.8	6.1	6.6	7.4	6.2	6.3	7.7	6.7	7.4	7.1	6.9	18.0
20.0	3.8	4.5	5.5	4.0	4.4	5.2	4.5	5.0	5.8	4.6	4.7	6.1	5.1	5.8	5.4	5.4	20.0
22.0	2.7	3.4	4.4	2.9	3.3	4.0	3.4	3.8	4.6	3.5	3.5	4.9	3.9	4.6	4.2	4.3	22.0
24.0		2.4	3.2	1.9	2.2	2.9	2.2	2.7	3.5	2.4	2.4	3.9	2.8	3.5	3.0	2.9	24.0
26.0			2.5			2.2		2.0	2.7			3.0	2.0	2.7	2.4	2.2	26.0
28.0			1.8			1.4		1.2	2.0			2.3		2.0	1.6	1.6	28.0
30.0			1.2						1.5			1.7					30.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t



Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	86.0	85.0	65.0	80.0	64.0	77.0	54.0										4.0
4.5	75.0	76.0	61.0	74.0	60.0	71.0	51.0	61.0	61.0	55.0							4.5
5.0	66.0	68.0	57.0	67.0	56.0	65.0	49.0	57.0	57.0	53.0	53.0	53.0	53.0				5.0
6.0	53.0	53.0	51.0	53.0	50.0	51.0	45.0	48.0	51.0	50.0	48.0	53.0	52.6	42.0	41.0	34.0	6.0
7.0	42.0	41.0	41.0	41.0	40.0	37.0	38.0	37.0	45.0	46.0	37.5	44.0	46.0	35.0	37.0	31.0	7.0
8.0	30.0	29.6	32.0	29.7	33.0	30.0	32.0	31.0	32.5	34.5	31.0	32.0	34.0	31.0	33.0	29.2	8.0
9.0	23.5	22.5	25.3	22.5	26.0	23.1	27.0	24.0	25.3	27.0	24.9	24.6	26.5	25.8	26.2	26.2	9.0
10.0		17.7	20.3	17.7	20.9	18.2	21.8	19.0	20.3	21.8	19.9	19.6	21.4	20.7	21.1	22.0	10.0
11.0		14.2	16.7	14.3	17.2	14.7	18.1	15.5	16.7	18.1	16.3	16.1	17.7	17.0	17.4	18.3	11.0
12.0		11.7	14.0	11.7	14.5	12.1	15.3	12.8	13.9	15.3	13.6	13.4	14.9	14.3	14.6	15.5	12.0
14.0				7.9	10.7	8.4	11.4	9.1	10.1	11.4	9.8	9.6	11.0	10.4	10.8	11.5	14.0
16.0				5.4	8.2	5.8	8.8	6.5	7.5	8.8	7.2	7.0	8.4	7.9	8.2	8.9	16.0
18.0						4.0	7.0	4.6	5.6	6.9	5.2	5.0	6.5	5.9	6.2	7.0	18.0
20.0								3.2	4.2	5.4	3.8	3.6	5.0	4.4	4.8	5.5	20.0
22.0								2.1	3.1	4.3	2.7	2.5	3.9	3.3	3.6	4.4	22.0
24.0											1.8	1.6	3.0	2.4	2.7	3.5	24.0
26.0													2.3	1.7	2.0	2.7	26.0
28.0															1.4	2.1	28.0
30.0																1.6	30.0
Rope rate	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Rope rate
Boom II	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom II
Boom III	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom III
Boom IV	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom IV
Boom V	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



22 SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Load Chart - Telescopic Boom

Unit: t



Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
6.0																	6.0
7.0	35.0	34.0	28.5	27.0	26.0												7.0
8.0	30.0	30.0	26.8	27.0	26.0	26.0											8.0
9.0	24.3	25.2	25.1	23.6	24.2	24.4	23.0	22.2	20.3								9.0
10.0	19.3	20.2	21.4	19.6	20.1	21.1	20.2	20.8	19.3	20.1	19.5	16.4					10.0
11.0	15.8	16.6	17.7	16.0	16.5	17.4	16.6	17.1	18.1	16.7	16.8	15.6					11.0
12.0	13.1	13.9	14.9	13.3	13.8	14.6	13.9	14.4	15.3	14.0	14.1	13.9	14.5	13.8			12.0
14.0	9.3	10.0	11.0	9.6	10.0	10.7	10.0	10.5	11.3	10.1	10.2	11.6	10.6	11.3	11.0		14.0
16.0	6.7	7.4	8.4	6.9	7.4	8.1	7.4	7.9	8.7	7.5	7.6	9.0	8.0	8.7	8.4	8.4	16.0
18.0	4.8	5.5	6.5	5.0	5.4	6.2	5.5	6.0	6.8	5.6	5.7	7.1	6.1	6.8	6.4	6.4	18.0
20.0	3.3	4.0	5.0	3.5	3.9	4.7	4.0	4.5	5.3	4.1	4.2	5.6	4.6	5.3	4.9	4.9	20.0
22.0	2.2	2.9	3.9	2.4	2.8	3.5	2.9	3.3	4.1	3.0	3.0	4.4	3.4	4.1	3.8	3.8	22.0
24.0		2.0	2.9	1.5	1.9	2.6	1.9	2.4	3.2	2.0	2.1	3.5	2.5	3.2	2.8	2.9	24.0
26.0			2.2			1.9		1.7	2.4			2.7	1.8	2.4	2.1	2.2	26.0
28.0			1.6			1.2		1.0	1.8			2.1		1.8	1.4	1.5	28.0
30.0			1.0						1.3			1.5					30.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World.



Load Chart - Telescopic Boom

Unit: t



Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	100.0	90.0	69.0	84.0	68.0												3.5
4.0	95.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	87.0	82.0	61.0	82.0	60.0	77.0	51.0	61.0	61.0	55.0							4.5
5.0	81.0	77.0	57.0	76.0	56.0	75.0	49.0	61.0	57.0	53.0	53.0	53.0	53.0				5.0
5.5	75.5	72.0	53.0	71.0	54.0	72.0	47.0	61.0	54.0	51.0	53.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	66.0	65.0	51.0	65.0	50.0	66.0	45.0	61.0	51.0	50.0	53.0	53.0	52.0	44.0	41.0	34.5	6.0
6.5	61.0	60.0	47.0	60.0	48.0	61.0	43.0	61.0	48.5	48.0	53.0	53.0	51.0	44.0	39.0	33.0	6.5
7.0	50.0	49.0	45.0	49.0	46.0	49.5	41.0	50.0	45.5	46.0	51.0	50.5	50.0	44.0	37.0	31.5	7.0
8.0	40.0	39.0	41.0	39.0	41.0	39.0	37.0	40.0	41.0	42.0	41.0	40.0	42.0	41.0	33.0	29.2	8.0
9.0	33.0	32.0	34.0	32.0	34.0	32.0	34.0	33.0	34.0	35.0	33.5	33.0	35.0	34.0	30.0	27.4	9.0
10.0		26.5	29.0	27.0	29.0	27.0	30.0	28.0	28.0	30.0	28.0	28.0	29.0	29.0	28.0	25.3	10.0
11.0		23.0	25.0	23.0	25.0	23.0	26.0	24.0	24.0	26.0	24.0	24.0	25.0	25.0	25.0	23.3	11.0
12.0		19.9	21.5	19.8	22.0	20.0	23.0	20.5	21.0	22.5	21.0	21.0	22.0	22.0	22.0	21.8	12.0
14.0				15.4	17.6	15.7	18.2	16.2	16.9	18.0	16.8	16.5	17.8	17.3	17.5	18.2	14.0
16.0				12.2	14.3	12.5	14.9	13.0	13.6	14.8	13.5	13.2	14.5	14.0	14.2	14.8	16.0
18.0						10.1	12.5	10.5	11.2	12.3	11.0	10.8	12.0	11.6	11.7	12.3	18.0
20.0								8.7	9.3	10.5	9.2	8.9	10.2	9.7	9.8	10.4	20.0
22.0								7.3	7.9	9.0	7.7	7.4	8.7	8.2	8.3	8.9	22.0
24.0											6.5	6.3	7.5	7.0	7.1	7.7	24.0
26.0											5.6	5.3	6.5	6.0	6.1	6.7	26.0
28.0														5.2	5.3	5.9	28.0
30.0														4.5	4.6	5.2	30.0
32.0																	32.0
34.0																	34.0
36.0																	36.0
38.0																	38.0
40.0																	40.0
42.0																	42.0
44.0																	44.0
46.0																	46.0
48.0																	48.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII




24 SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	27.0												7.0
8.0	32.0	31.0	26.8	27.0	26.0	26.0											8.0
9.0	29.9	29.0	25.1	26.0	25.5	24.4	23.0	22.2	20.3								9.0
10.0	27.6	26.8	23.5	24.6	24.4	22.9	22.0	21.0	19.3	20.1	19.5	16.4					10.0
11.0	24.0	24.0	22.1	23.1	22.5	21.5	20.6	19.7	18.3	19.1	19.0	15.6					11.0
12.0	20.5	21.0	20.9	21.0	21.0	20.5	19.4	18.6	17.4	18.1	18.0	14.9	15.3	13.8			12.0
14.0	16.3	16.9	17.7	16.5	16.8	17.5	17.0	16.6	15.6	16.4	16.0	13.5	14.0	12.6	12.0		14.0
16.0	13.0	13.6	14.4	13.2	13.5	14.1	13.7	14.1	13.9	13.9	14.4	12.2	12.9	11.6	11.1	9.8	16.0
18.0	10.6	11.1	11.9	10.8	11.1	11.7	11.2	11.6	12.3	11.4	11.5	11.3	11.7	10.7	10.4	9.3	18.0
20.0	8.7	9.3	10.0	8.9	9.2	9.8	9.4	9.7	10.4	9.5	9.6	10.4	9.9	9.9	9.6	8.7	20.0
22.0	7.2	7.8	8.5	7.4	7.7	8.3	7.8	8.2	8.8	8.0	8.1	9.2	8.3	8.9	8.6	8.2	22.0
24.0	6.0	6.6	7.3	6.2	6.5	7.1	6.6	7.0	7.6	6.8	6.9	7.9	7.1	7.6	7.4	7.4	24.0
26.0	5.0	5.6	6.3	5.2	5.5	6.0	5.6	6.0	6.6	5.8	5.9	6.9	6.1	6.6	6.3	6.3	26.0
28.0	4.1	4.7	5.5	4.3	4.7	5.2	4.8	5.1	5.7	4.9	5.0	6.0	5.2	5.7	5.5	5.5	28.0
30.0	3.3	4.0	4.7	3.5	3.9	4.5	4.0	4.4	5.0	4.2	4.2	5.3	4.5	5.0	4.7	4.7	30.0
32.0	2.6	3.3	4.1	2.8	3.2	3.8	3.3	3.7	4.4	3.5	3.5	4.7	3.8	4.4	4.1	4.1	32.0
34.0	2.1	2.7	3.6	2.2	2.6	3.2	2.7	3.1	3.8	2.8	2.9	4.1	3.2	3.8	3.5	3.5	34.0
36.0				1.7	2.1	2.7	2.1	2.6	3.3	2.3	2.4	3.6	2.6	3.3	2.9	2.9	36.0
38.0				1.2	1.6	2.2	1.7	2.1	2.8	1.8	1.9	3.1	2.2	2.8	2.5	2.5	38.0
40.0							1.3	1.7	2.4	1.4	1.5	2.7	1.8	2.3	2.0	2.0	40.0
42.0							0.9	1.3	2.0	1.0	1.2	2.3	1.4	2.0	1.6	1.6	42.0
44.0												2.0	1.0	1.6	1.3	1.3	44.0
46.0												1.7		1.3	1.0	1.0	46.0
48.0														1.0			48.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World.



Load Chart - Telescopic Boom

Unit: t




Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	95.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	87.0	82.0	61.0	82.0	60.0	77.0	51.0	61.0	61.0	55.0							4.5
5.0	75.0	76.0	57.0	76.0	56.0	75.0	49.0	61.0	57.0	53.0	53.0	53.0	53.0				5.0
5.5	70.0	69.0	53.0	69.0	54.0	70.0	47.0	61.0	54.0	51.0	53.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	54.0	52.0	51.0	52.0	50.0	53.0	45.0	54.0	51.0	50.0	53.0	53.0	52.0	44.0	41.0	34.5	6.0
6.5	50.0	49.0	47.0	49.0	48.0	50.0	43.0	51.0	48.5	48.0	52.0	52.0	51.0	44.0	39.0	33.0	6.5
7.0	40.0	39.0	41.5	39.0	42.0	40.0	41.0	40.0	45.5	43.0	41.0	41.0	43.0	42.0	37.0	31.5	7.0
8.0	32.0	31.0	33.0	31.0	33.0	31.0	34.0	32.0	33.0	34.0	33.0	32.0	34.0	33.0	33.0	29.2	8.0
9.0	26.0	25.0	27.0	25.0	27.0	25.0	28.0	26.0	27.0	28.0	27.0	26.0	28.0	27.0	27.0	27.4	9.0
10.0		21.0	23.0	21.0	23.0	21.0	24.0	22.0	22.5	24.0	22.0	22.0	23.0	23.0	23.0	24.0	10.0
11.0		17.8	19.8	17.8	20.0	18.2	21.0	18.8	19.0	20.0	19.4	19.0	20.0	20.0	20.0	20.0	11.0
12.0		15.2	17.2	15.3	19.1	15.7	18.3	16.2	16.8	18.2	16.8	16.5	17.9	17.4	17.5	18.2	12.0
14.0				11.5	13.7	11.9	14.4	12.4	13.0	14.3	12.9	12.6	14.0	13.5	13.6	14.3	14.0
16.0				8.9	11.0	9.2	11.7	9.7	10.3	11.5	10.2	9.9	11.2	10.8	10.8	11.5	16.0
18.0						7.2	9.6	7.7	8.3	9.5	8.2	7.9	9.2	8.7	8.8	9.5	18.0
20.0								6.2	6.8	7.9	6.7	6.4	7.6	7.2	7.3	7.9	20.0
22.0								5.0	5.6	6.7	5.5	5.2	6.4	5.9	6.0	6.7	22.0
24.0											4.5	4.0	5.4	4.9	5.0	5.7	24.0
26.0											3.6	3.2	4.6	4.1	4.2	4.8	26.0
28.0														3.4	3.5	4.2	28.0
30.0														2.7	2.9	3.6	30.0
32.0																	32.0
34.0																	34.0
36.0																	36.0
38.0																	38.0
40.0																	40.0
42.0																	42.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



26 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	27.0												7.0
8.0	32.0	31.0	26.8	27.0	26.0	26.0											8.0
9.0	26.0	27.0	25.1	26.0	25.5	24.4	23.0	22.2	20.3								9.0
10.0	22.0	22.0	23.5	22.0	22.0	22.9	22.0	21.0	19.3	20.1	19.5	16.4					10.0
11.0	18.9	19.5	20.0	19.0	19.5	20.0	19.0	19.7	18.3	19.1	19.0	15.6					11.0
12.0	16.3	16.9	17.8	16.5	16.9	17.5	17.0	17.5	17.4	17.3	17.0	14.9	15.3	13.8			12.0
14.0	12.4	13.0	13.9	12.6	13.0	13.6	13.2	13.6	14.3	13.4	13.5	13.5	13.6	12.6	12.0		14.0
16.0	9.7	10.3	11.1	9.9	10.3	10.9	10.4	10.8	11.5	10.6	10.7	11.9	11.0	11.5	11.1	9.8	16.0
18.0	7.7	8.3	9.1	7.9	8.2	8.8	8.4	8.8	9.4	8.6	8.7	9.8	8.9	9.5	9.2	9.2	18.0
20.0	6.2	6.7	7.5	6.3	6.7	7.3	6.8	7.2	7.8	7.0	7.1	8.2	7.3	7.9	7.6	7.6	20.0
22.0	5.0	5.5	6.3	5.1	5.5	6.0	5.6	6.0	6.6	5.8	5.8	6.9	6.1	6.6	6.3	6.3	22.0
24.0	3.9	4.5	5.2	4.0	4.4	5.0	4.6	4.9	5.6	4.8	4.8	5.9	5.0	5.6	5.3	5.3	24.0
26.0	2.9	3.6	4.4	3.1	3.5	4.2	3.6	4.1	4.7	3.8	3.9	5.0	4.2	4.7	4.5	4.5	26.0
28.0	2.2	2.8	3.7	2.3	2.7	3.4	2.8	3.3	4.0	3.1	3.1	4.3	3.4	4.0	3.7	3.7	28.0
30.0	1.5	2.2	3.0	1.7	2.1	2.7	2.2	2.6	3.3	2.4	2.5	3.7	2.7	3.3	3.0	3.0	30.0
32.0	1.0	1.6	2.5	1.1	1.5	2.1	1.6	2.0	2.7	1.8	1.9	3.1	2.1	2.7	2.4	2.4	32.0
34.0		1.1	2.0		1.0	1.6	1.1	1.5	2.2	1.3	1.4	2.6	1.6	2.2	1.9	1.9	34.0
36.0						1.2		1.1	1.8	0.8	0.9	2.2	1.0	1.8	1.5	1.5	36.0
38.0						0.8			1.4			1.8	0.8	1.4	1.1	1.1	38.0
40.0									1.1			1.4		1.0			40.0
42.0									0.8			1.1					42.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t




Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	95.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	86.0	82.0	61.0	82.0	60.0	77.0	51.0	61.0	61.0	55.0							4.5
5.0	73.0	72.0	57.0	72.0	56.0	72.0	49.0	61.0	57.0	53.0	53.0	53.0	53.0				5.0
5.5	59.0	58.0	53.0	58.0	54.0	59.0	47.0	60.0	54.0	51.0	53.0	53.0	53.0	44.0	43.0	36.0	5.5
6.0	49.0	48.0	51.0	48.0	50.0	49.0	45.0	50.0	51.0	50.0	51.0	50.0	52.0	44.0	41.0	34.5	6.0
6.5	42.0	41.0	44.0	41.0	45.0	42.0	43.0	43.0	44.0	46.0	43.0	43.0	45.0	44.0	39.0	33.0	6.5
7.0	36.0	36.0	38.0	36.0	39.0	36.0	40.0	37.0	38.5	40.0	38.0	38.0	39.5	39.0	37.0	31.5	7.0
8.0	28.9	28.0	30.0	28.1	31.0	28.5	31.0	29.3	30.0	31.0	30.0	29.9	31.5	30.0	31.0	29.2	8.0
9.0	23.4	22.5	24.8	22.6	25.4	23.0	26.2	23.7	24.8	26.1	24.5	24.3	25.8	25.2	25.5	26.4	9.0
10.0		18.6	20.8	18.6	21.2	19.0	22.0	19.7	20.7	22.0	20.4	20.2	21.6	21.1	21.4	22.2	10.0
11.0		15.5	17.7	15.6	18.1	16.0	18.9	16.6	17.6	18.8	17.3	17.1	18.5	17.9	18.2	19.0	11.0
12.0		13.2	15.2	13.2	15.7	13.6	16.4	14.2	15.1	16.3	14.8	14.7	16.0	15.5	15.8	16.5	12.0
14.0				9.7	12.1	10.1	12.7	10.6	11.5	12.7	11.2	11.1	12.3	11.8	12.1	12.8	14.0
16.0				7.1	9.6	7.5	10.2	8.1	9.0	10.1	8.7	8.6	9.8	9.3	9.6	10.3	16.0
18.0						5.6	8.3	6.2	7.1	8.2	6.8	6.6	7.9	7.4	7.7	8.4	18.0
20.0								4.7	5.6	6.8	5.3	5.1	6.4	5.9	6.2	6.9	20.0
22.0								3.5	4.4	5.6	4.1	3.9	5.2	4.7	4.9	5.7	22.0
24.0											3.1	2.9	4.2	3.7	4.0	4.7	24.0
26.0											2.3	2.2	3.5	2.9	3.2	3.9	26.0
28.0														2.2	2.5	3.2	28.0
30.0														1.7	1.9	2.6	30.0
32.0																	32.0
34.0																	34.0
36.0																	36.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



28 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t



Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	35.5	35.0	29.7														6.5
7.0	35.0	34.0	28.5	27.0	27.0												7.0
8.0	29.6	30.0	26.8	27.0	26.0	26.0											8.0
9.0	24.0	24.8	25.1	24.2	24.7	24.4	23.0	22.2	20.3								9.0
10.0	20.0	20.7	21.7	20.2	20.6	21.4	20.7	21.0	19.3	20.1	19.5	16.4					10.0
11.0	16.9	17.6	18.5	17.1	17.5	18.2	17.5	18.0	18.3	17.6	17.7	15.6					11.0
12.0	14.4	15.1	16.0	14.6	15.0	15.7	15.1	15.5	16.3	15.2	15.3	14.9	15.3	13.8			12.0
14.0	10.8	11.5	12.4	11.0	11.4	12.1	11.5	11.9	12.6	11.6	11.6	12.9	12.0	12.6	12.0		14.0
16.0	8.3	9.0	9.8	8.5	8.9	9.5	8.9	9.4	10.1	9.0	9.1	10.3	9.5	10.1	9.8	9.3	16.0
18.0	6.3	7.0	7.9	6.5	6.9	7.6	7.0	7.4	8.2	7.1	7.2	8.4	7.6	8.2	7.9	7.9	18.0
20.0	4.8	5.5	6.4	5.0	5.4	6.1	5.5	5.9	6.7	5.5	5.6	6.9	6.0	6.7	6.3	6.3	20.0
22.0	3.6	4.3	5.2	3.8	4.2	4.9	4.2	4.7	5.4	4.3	4.4	5.7	4.8	5.4	5.1	5.1	22.0
24.0	2.6	3.3	4.2	2.8	3.2	3.9	3.3	3.7	4.4	3.3	3.4	4.7	3.8	4.4	4.1	4.1	24.0
26.0	1.8	2.5	3.4	2.0	2.4	3.1	2.4	2.9	3.6	2.5	2.6	3.9	3.0	3.6	3.3	3.3	26.0
28.0	1.2	1.8	2.7	1.3	1.7	2.4	1.8	2.2	2.9	1.8	1.9	3.2	2.3	2.9	2.6	2.6	28.0
30.0		1.2	2.1		1.1	1.8	1.2	1.6	2.3	1.3	1.3	2.6	1.7	2.3	2.0	2.0	30.0
32.0			1.6			1.3		1.1	1.8			2.1	1.2	1.8	1.5	1.5	32.0
34.0			1.2						1.4			1.6		1.3	1.0	1.0	34.0
36.0									1.0			1.2					36.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t



Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	93.0	87.0	65.0	84.0	64.0	77.0	54.0										4.0
4.5	74.0	73.0	61.0	73.0	60.0	74.0	51.0	61.0	61.0	55.0							4.5
5.0	57.0	56.0	57.0	56.0	56.0	57.0	49.0	58.0	57.0	53.0	53.0	53.0					5.0
5.5	46.0	45.0	48.0	45.0	49.0	46.0	47.0	47.0	48.0	50.0	48.0	47.0	50.0	44.0	43.0	36.0	5.5
6.0	38.0	37.0	40.0	37.0	41.0	38.0	42.0	39.0	40.0	42.0	40.0	39.5	41.0	41.0	41.0	34.0	6.0
6.5	32.0	31.0	34.0	31.0	35.0	32.0	36.0	33.0	34.5	36.0	34.0	34.0	35.5	35.0	35.5	33.0	6.5
7.0	28.4	27.4	30.0	27.5	30.0	28.0	31.0	28.9	30.0	31.5	29.7	29.5	31.0	30.0	30.5	31.0	7.0
8.0	21.9	21.1	23.5	21.1	24.1	21.6	25.0	22.4	23.5	24.9	23.1	22.9	24.5	23.9	24.3	25.2	8.0
9.0	17.5	16.7	19.0	16.7	19.5	17.2	20.3	17.9	19.0	20.3	18.6	18.4	19.9	19.3	19.7	20.5	9.0
10.0		13.5	15.7	13.5	16.2	14.0	17.0	14.6	15.7	16.9	15.3	15.1	16.6	16.0	16.3	17.1	10.0
11.0		11.1	13.2	11.1	13.7	11.5	14.4	12.2	13.1	14.4	12.8	12.6	14.0	13.5	13.8	14.6	11.0
12.0		9.1	11.3	9.2	11.7	9.6	12.4	10.2	11.2	12.3	10.8	10.7	12.0	11.5	11.8	12.5	12.0
14.0				6.2	8.8	6.6	9.5	7.3	8.3	9.4	7.9	7.7	9.1	8.6	8.8	9.5	14.0
16.0				4.2	6.7	4.5	7.4	5.1	6.1	7.3	5.8	5.6	7.0	6.4	6.8	7.5	16.0
18.0						3.0	5.9	3.6	4.5	5.7	4.2	4.0	5.4	4.8	5.1	5.9	18.0
20.0								2.4	3.3	4.5	3.0	2.8	4.1	3.6	3.9	4.6	20.0
22.0								1.5	2.4	3.6	3.0	1.8	3.2	2.6	2.9	3.6	22.0
24.0											1.3	1.1	2.4	1.8	2.1	2.8	24.0
26.0													1.8	1.2	1.5	2.2	26.0
28.0																1.6	28.0
30.0																1.2	30.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



30

SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	33.0	34.0	29.7														6.5
7.0	29.1	30.0	28.5	27.0	26.0												7.0
8.0	22.6	23.4	24.6	22.8	23.4	24.2											8.0
9.0	18.2	18.9	20.0	18.4	18.9	19.6	18.9	19.4	20.3								9.0
10.0	14.9	15.6	16.6	15.1	15.6	16.3	15.6	16.1	16.9	15.7	15.8	16.4					10.0
11.0	12.4	13.1	14.1	12.6	13.0	13.8	13.1	13.6	14.4	13.2	13.3	14.6					11.0
12.0	10.4	11.1	12.0	10.7	11.1	11.8	11.1	11.6	12.3	11.2	11.3	12.6	11.7	12.4			12.0
14.0	7.5	8.2	9.1	7.7	8.1	8.8	8.2	8.6	9.4	8.3	8.4	9.6	8.7	9.4	9.0		14.0
16.0	5.3	6.0	7.0	5.5	6.0	6.7	6.0	6.5	7.3	6.1	6.2	7.5	6.6	7.3	6.9	7.0	16.0
18.0	3.7	4.4	5.4	3.9	4.4	5.1	4.4	4.9	5.6	4.5	4.6	5.9	5.0	5.7	5.3	5.3	18.0
20.0	2.5	3.2	4.1	2.7	3.1	3.8	3.2	3.6	4.4	3.3	3.3	4.7	3.7	4.4	4.0	4.1	20.0
22.0	1.6	2.2	3.1	1.7	2.1	2.8	2.2	2.6	3.4	2.3	2.4	3.7	2.7	3.4	3.0	3.1	22.0
24.0		1.4	2.3	1.0	1.4	2.0	1.4	1.8	2.6	1.5	1.6	2.9	1.9	2.6	2.2	2.2	24.0
26.0			1.7			1.4		1.2	1.9			2.2	1.3	1.9	1.6	1.6	26.0
28.0			1.1						1.3			1.6		1.3	1.0	1.0	28.0
30.0												1.1					30.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t




Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	77.4	74.7	65.0	74.1	64.0	73.7	54.0										4.0
4.5	55.9	54.9	56.0	54.9	56.7	55.1	51.0	53.5	56.0	55.0							4.5
5.0	43.0	41.2	44.7	42.0	45.3	42.2	44.9	43.2	44.7	45.6	43.1	43.1	45.6				5.0
5.5	34.5	32.7	36.5	33.5	37.5	33.7	37.9	34.7	36.5	38.5	35.7	35.5	38.1	35.8	36.4	36.0	5.5
6.0	28.4	27.4	30.4	27.4	31.2	28.1	32.1	29.1	30.4	32.1	29.9	29.7	31.6	30.9	31.3	30.7	6.0
6.5	23.9	22.9	25.8	22.9	26.4	23.6	27.5	24.5	25.8	27.5	25.4	25.2	27.0	26.3	26.7	27.1	6.5
7.0	20.6	19.6	21.0	19.7	22.7	20.2	23.7	21.1	22.2	23.8	21.9	21.7	23.4	22.7	23.0	23.9	7.0
8.0	15.5	14.7	17.1	14.7	17.7	15.2	18.6	16.0	17.1	18.5	16.7	16.5	18.1	17.5	17.9	18.8	8.0
9.0	12.2	11.3	13.6	11.3	14.1	11.8	14.9	12.5	13.6	14.9	13.2	13.0	14.5	13.9	14.3	15.1	9.0
10.0		8.7	11.1	8.8	11.6	9.3	12.4	10.0	11.0	12.3	10.7	10.5	11.9	11.4	11.7	12.5	10.0
11.0		6.8	9.1	6.8	9.6	7.3	10.3	8.0	9.0	10.3	8.7	8.5	9.9	9.4	9.7	10.5	11.0
12.0		5.2	7.6	5.3	8.0	5.7	8.7	6.4	7.5	8.6	7.1	6.9	8.3	7.8	8.1	8.8	12.0
14.0				3.0	5.6	3.4	6.4	4.1	5.1	6.3	4.7	4.5	5.9	5.4	5.6	6.5	14.0
16.0					4.0	1.7	4.7	2.3	3.3	4.6	3.0	2.8	4.2	3.6	4.0	4.7	16.0
18.0							3.3		2.2	3.3	1.7	1.4	2.7	2.3	2.7	3.3	18.0
20.0										2.4			1.8	1.4	1.6	2.4	20.0
22.0										1.6					1.6		22.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



32 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t



Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	24.7	25.6	26.0														6.5
7.0	21.3	22.2	23.0	21.1	21.4												7.0
8.0	16.2	17.0	18.2	16.4	17.0	17.8											8.0
9.0	12.8	13.5	14.6	13.0	13.4	14.2	13.5	14.0	14.9								9.0
10.0	10.3	11.0	12.0	10.5	10.9	11.7	11.0	11.5	12.3	11.0	11.1	12.4					10.0
11.0	8.3	9.0	10.0	8.5	8.9	9.7	9.0	9.5	10.3	9.1	9.2	10.5					11.0
12.0	6.6	7.4	8.3	6.9	7.3	8.1	7.4	7.9	8.6	7.5	7.6	8.9	8.0	8.7			12.0
14.0	4.3	5.0	5.9	4.5	4.9	5.6	5.0	5.4	6.2	5.1	5.2	6.6	5.5	6.3	5.7		14.0
16.0	2.5	3.2	4.2	2.7	3.2	3.9	3.2	3.7	4.5	3.3	3.4	4.8	3.8	4.5	4.0	3.7	16.0
18.0		2.1	3.0	1.4	1.9	2.4	1.9	2.2	3.1	2.0	2.2	3.5	2.3	3.2	2.7	2.4	18.0
20.0			2.0			1.5		1.3	2.1			2.3	1.4	2.1	1.6	1.5	20.0
22.0								1.3				1.6		1.4			22.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	46	92	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Load Chart - Telescopic Boom

Unit: t



Radius (m)	12.1	16.1	16.1	20	20	24	24	27.9	27.9	27.9	31.8	31.8	31.8	35.5	35.5	35.5	Radius (m)
3.0	110.0	92.0	75.0	84.0	74.0												3.0
3.5	98.0	90.0	69.0	84.0	68.0												3.5
4.0	74.0	72.0	65.0	72.0	64.0	73.0	54.0										4.0
4.5	52.0	51.0	55.0	51.0	56.0	51.0	51.0	53.0	55.0	55.0							4.5
5.0	40.0	38.0	42.0	39.0	43.0	39.0	44.0	40.0	42.0	44.0	41.0	41.0	44.0				5.0
5.5	32.0	30.0	34.0	31.0	35.0	31.0	36.0	32.0	34.0	36.0	33.0	33.0	35.5	34.0	35.0	36.0	5.5
6.0	26.4	25.3	28.4	25.4	29.1	26.0	30.0	27.0	28.4	30.0	27.8	27.6	29.6	28.8	29.2	30.0	6.0
6.5	22.2	21.2	24.0	21.2	24.6	21.8	25.7	22.7	24.0	25.7	23.6	23.3	25.2	24.4	24.8	25.9	6.5
7.0	18.9	18.0	20.0	18.0	21.2	18.5	22.2	19.4	20.6	22.2	20.2	20.0	21.8	21.1	21.4	22.4	7.0
8.0	14.2	13.3	15.8	13.4	16.4	13.9	17.3	14.6	15.8	17.2	15.4	15.2	16.8	16.2	16.5	17.5	8.0
9.0	11.1	10.2	12.5	10.2	13.0	10.7	13.8	11.4	12.5	13.8	12.1	11.9	13.4	12.8	13.2	14.0	9.0
10.0		7.7	10.1	7.8	10.6	8.3	11.4	9.0	10.0	11.3	9.7	9.5	10.9	10.4	10.7	11.5	10.0
11.0		5.9	8.3	5.9	8.7	6.4	9.5	7.1	8.2	9.4	7.8	7.6	9.1	8.5	8.8	9.6	11.0
12.0		4.4	6.8	4.5	7.2	4.9	8.0	5.6	6.7	7.9	6.3	6.1	7.6	7.0	7.3	8.1	12.0
14.0				2.3	5.0	2.7	5.8	3.4	4.4	5.7	4.1	3.9	5.3	4.7	5.0	5.9	14.0
16.0					3.5	1.2	4.2	1.8	2.8	4.1	2.5	2.3	3.7	3.1	3.4	4.2	16.0
18.0							3.0		1.7	2.9	1.3	1.1	2.5	2.0	2.2	3.0	18.0
20.0										2.0			1.6	1.1	1.3	2.1	20.0
22.0										1.3						1.4	22.0
Rope rate	12	11	11	10	10	9	9	7	7	7	6	6	6	5	5	5	Rope rate
Boom II	0	46	0	46	0	46	0	46	0	0	46	46	0	46	0	0	Boom II
Boom III	0	0	0	46	0	46	0	46	46	0	46	46	46	46	92	46	Boom III
Boom IV	0	0	0	0	0	46	0	46	46	46	46	46	46	46	46	46	Boom IV
Boom V	0	0	0	0	46	0	46	46	92	46	46	92	46	46	46	46	Boom V
Boom VI	0	0	46	0	46	0	46	0	0	46	46	0	46	46	46	46	Boom VI
Boom VII	0	0	0	0	0	0	46	0	0	46	0	0	46	46	46	92	Boom VII



34 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Telescopic Boom

Unit: t




Radius (m)	39.5	39.5	39.5	43.4	43.4	43.4	47.4	47.4	47.4	51.3	51.3	51.3	55	55	58.9	63	Radius (m)
3.0																	3.0
3.5																	3.5
4.0																	4.0
4.5																	4.5
5.0																	5.0
5.5																	5.5
6.0																	6.0
6.5	22.9	23.8	25.2	0.0													6.5
7.0	19.6	20.5	21.8	19.9	20.4												7.0
8.0	14.9	15.7	16.8	15.1	15.6	16.5											8.0
9.0	11.7	12.4	13.5	11.9	12.3	13.1	12.4	12.9	13.8								9.0
10.0	9.3	10.0	11.0	9.5	9.9	10.7	10.0	10.5	11.3	10.0	10.1	11.6					10.0
11.0	7.4	8.1	9.1	7.6	8.1	8.8	8.1	8.6	9.4	8.2	8.3	9.7	7.2	7.9			11.0
12.0	5.8	6.6	7.6	6.1	6.5	7.3	6.6	7.1	7.9	6.7	6.8	8.2	7.2	7.9	7.2		12.0
14.0	3.6	4.3	5.3	3.8	4.3	5.0	4.3	4.8	5.6	4.4	4.5	6.0	4.9	5.7	5.3	5.3	14.0
16.0	2.0	2.7	3.7	2.2	2.7	3.4	2.7	3.2	4.0	2.8	2.9	4.3	3.3	4.0	3.6	3.7	16.0
18.0		1.6	2.5	1.1	1.5	2.2	1.5	2.0	2.8	1.6	1.7	3.1	2.1	2.8	2.4	2.4	18.0
20.0			1.6			1.3		1.1	1.8			2.1	1.2	1.9	1.5	1.5	20.0
22.0								1.1				1.4		1.1			22.0
Rope rate	4	4	4	3	3	3	3	3	3	3	3	3	2	2	2	2	Rope rate
Boom II	92	92	46	92	92	46	92	46	0	92	92	0	92	46	92	100	Boom II
Boom III	92	46	46	92	92	46	92	92	92	92	92	92	92	92	92	100	Boom III
Boom IV	46	46	46	92	46	92	92	92	92	92	92	92	92	92	92	100	Boom IV
Boom V	46	46	46	46	46	92	46	92	92	92	92	92	92	92	92	100	Boom V
Boom VI	46	46	46	46	46	92	46	92	92	92	92	46	92	92	92	100	Boom VI
Boom VII	0	46	92	0	46	0	46	0	46	0	46	92	46	92	92	100	Boom VII

Quality Changes the World



Jib Operating Range

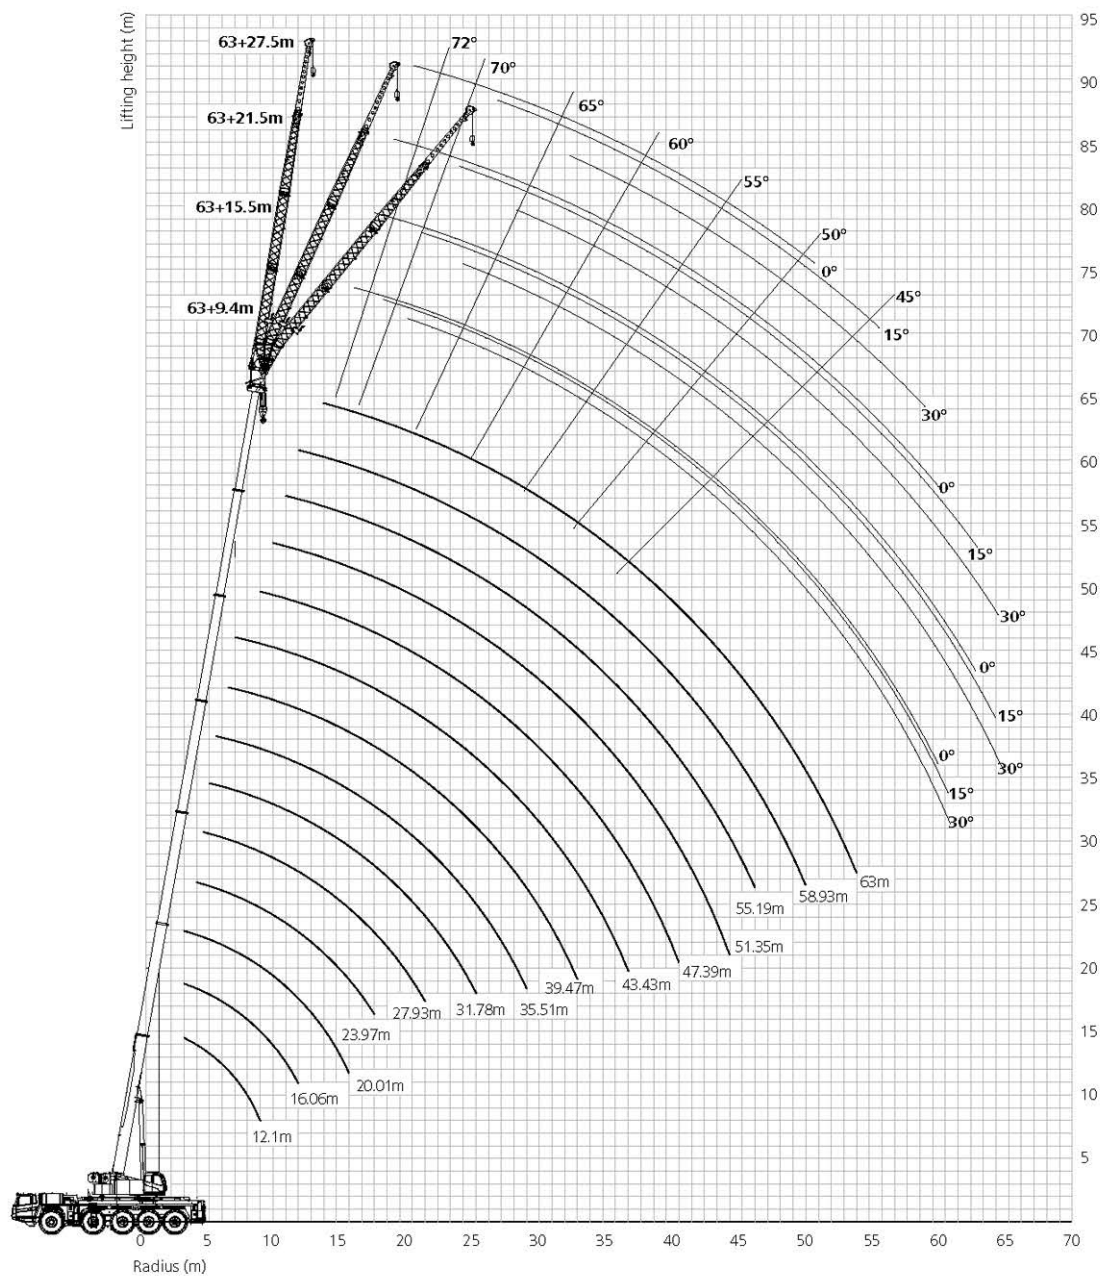

36 SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Load Chart - Fixed Jib

Unit: t



Radius (m)	31.8			35.5			39.5			43.4			47.4			Radius (m)
	9.4			9.4			9.4			9.4			9.4			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
6.0	8.0			8.0												6.0
6.5	8.0			8.0												6.5
7.0	8.0	8.0		8.0			8.0									7.0
8.0	8.0	8.0		8.0	7.9		8.0			8.0						8.0
9.0	8.0	8.0	7.8	8.0	7.9		8.0	8.0		8.0			8.0			9.0
10.0	8.0	8.0	7.8	7.9	7.9	7.9	8.0	8.0		8.0			8.0			10.0
11.0	8.0	7.8	7.8	7.9	7.8	7.9	8.0	8.0	7.9	7.9	8.0		8.0	8.0		11.0
12.0	7.9	7.8	7.8	7.9	7.8	7.7	8.0	7.9	7.9	7.9	8.0		7.9	7.9		12.0
14.0	7.9	7.8	7.6	7.8	7.7	7.7	7.9	7.9	7.8	7.8	7.9	7.9	7.9	7.9	7.8	14.0
16.0	7.9	7.8	7.6	7.8	7.7	7.5	7.9	7.8	7.8	7.8	7.9	7.9	7.9	7.8	7.8	16.0
18.0	7.9	7.6	7.6	7.8	7.5	7.5	7.8	7.8	7.8	7.5	7.8	7.6	7.8	7.8	7.6	18.0
20.0	7.8	7.6	7.6	7.6	7.5	7.3	7.8	7.5	7.4	7.5	7.7	7.6	7.8	7.6	7.0	20.0
22.0	7.8	7.6	7.4	7.6	7.3	7.3	7.4	6.9	6.7	7.2	7.7	7.1	7.6	7.0	6.3	22.0
24.0	7.8	7.6	7.4	7.6	7.3	7.2	6.8	6.3	6.0	6.5	6.9	6.5	7.0	6.3	5.8	24.0
26.0	7.8	7.6	7.4	7.6	7.1	6.6	6.3	5.8	5.5	5.8	6.3	5.9	6.2	5.7	5.3	26.0
28.0	7.0	6.8	6.6	7.1	6.4	5.9	5.7	5.2	4.9	5.4	5.7	5.4	5.5	5.1	4.8	28.0
30.0	6.0	6.1	5.9	6.4	5.8	5.4	5.1	4.7	4.5	4.9	5.2	4.9	5.0	4.6	4.4	30.0
32.0	4.7	5.4	5.2	5.6	5.2	5.0	4.5	4.3	4.1	4.4	4.6	4.5	4.5	4.2	4.0	32.0
34.0	3.4	4.5	4.5	4.9	4.7	4.5	4.1	3.8	3.7	3.9	4.2	4.0	4.0	3.8	3.7	34.0
36.0	2.5	3.6	3.8	4.2	4.1	4.0	3.6	3.5	3.3	3.7	3.8	3.6	3.6	3.5	3.3	36.0
38.0	2.0	2.7	3.1	3.5	3.5	3.5	3.2	3.1	3.0	3.3	3.4	3.3	3.2	3.1	3.0	38.0
40.0				2.8	2.9	3.0	2.9	2.8	2.7	3.1	3.0	3.0	2.9	2.7	2.7	40.0
42.0				2.1	2.3	2.5	2.5	2.5	2.4	2.8	2.8	2.7	2.6	2.5	2.4	42.0
44.0							2.2	2.2	2.1	2.5	2.4	2.4	2.3	2.2	2.2	44.0
46.0							1.8	1.8	1.7	2.3	2.2	2.2	2.0	1.9	1.9	46.0
48.0										1.9	1.9	2.0	1.7	1.7	1.7	48.0
50.0										1.5	1.6	1.5	1.4	1.5	1.4	50.0
52.0													1.1	1.2	1.2	52.0
54.0													0.9	0.9	0.8	54.0
56.0																56.0
58.0																58.0
60.0																60.0
Boom II	46	46	46	46	46	46	92	92	92	92	92	92	92	92	92	Boom II
Boom III	46	46	46	46	46	46	46	46	46	92	92	92	92	92	92	Boom III
Boom IV	46	46	46	46	46	46	46	46	46	46	46	46	92	92	92	Boom IV
Boom V	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46	Boom V
Boom VI	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46	Boom VI
Boom VII	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46	Boom VII

Quality Changes the World



Load Chart - Fixed Jib

Unit: t



Radius (m)	51.3			55.2			58.9			63.0			Radius (m)
	9.4			9.4			9.4			9.4			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
6.0													6.0
6.5													6.5
7.0													7.0
8.0													8.0
9.0													9.0
10.0	8.0			6.7									10.0
11.0	8.0			6.7			6.8						11.0
12.0	8.0	8.0		6.7			6.8			5.7			12.0
14.0	7.9	7.9		6.7	6.5		6.8	6.7		5.7			14.0
16.0	7.9	7.8	7.7	6.7	6.5	6.2	6.7	6.7	6.4	5.7	5.6		16.0
18.0	7.9	7.7	7.5	6.5	6.4	6.0	6.5	6.4	6.3	5.7	5.6	5.4	18.0
20.0	7.4	7.2	7.0	6.2	6.1	5.7	6.3	6.1	6.1	5.7	5.5	5.4	20.0
22.0	7.0	6.8	6.4	5.9	5.8	5.4	6.0	5.9	5.8	5.6	5.4	5.4	22.0
24.0	6.5	6.4	5.9	5.6	5.5	5.2	5.7	5.6	5.5	5.4	5.2	5.2	24.0
26.0	5.9	5.8	5.4	5.3	5.2	4.9	5.3	5.3	5.3	5.3	5.0	5.0	26.0
28.0	5.4	5.2	4.9	5.0	5.0	4.7	5.0	5.0	5.0	4.9	4.8	4.7	28.0
30.0	4.8	4.8	4.5	4.7	4.7	4.5	4.7	4.7	4.8	4.5	4.5	4.4	30.0
32.0	4.3	4.3	4.1	4.3	4.4	4.2	4.5	4.5	4.5	4.2	4.2	4.1	32.0
34.0	4.0	3.9	3.7	3.9	4.2	4.0	4.3	4.2	4.3	3.9	3.9	3.8	34.0
36.0	3.6	3.5	3.4	3.5	3.8	3.8	4.0	4.0	4.0	3.5	3.6	3.6	36.0
38.0	3.3	3.1	3.1	3.1	3.4	3.4	3.6	3.7	3.7	3.2	3.2	3.3	38.0
40.0	2.9	2.8	2.8	2.8	3.1	3.1	3.3	3.4	3.4	2.9	2.9	3.0	40.0
42.0	2.5	2.5	2.5	2.6	2.8	2.8	3.0	3.1	3.1	2.7	2.7	2.7	42.0
44.0	2.3	2.2	2.2	2.2	2.6	2.6	2.7	2.8	2.8	2.5	2.5	2.5	44.0
46.0	2.0	2.0	2.0	2.0	2.3	2.3	2.4	2.5	2.6	2.2	2.3	2.3	46.0
48.0	1.7	1.7	1.7	1.8	2.1	2.1	2.2	2.2	2.3	1.9	2.0	2.1	48.0
50.0	1.5	1.5	1.5	1.5	1.8	1.8	1.8	2.0	2.1	1.8	1.8	1.8	50.0
52.0	1.3	1.3	1.3	1.3	1.4	1.5	1.5	1.6	1.7	1.4	1.6	1.7	52.0
54.0	0.9	1.0	1.0	1.0	1.1	1.2	1.2	1.3	1.4	1.1	1.3	1.4	54.0
56.0	0.6	0.7	0.7	0.7	0.8	0.9	0.9	1.0	1.1	0.9	1.0	1.1	56.0
58.0				0.5	0.6	0.6	0.7	0.8	0.8	0.6	0.7	0.8	58.0
60.0								0.5	0.6		0.5	0.6	60.0
Boom II	92	92	92	92	92	92	92	92	92	100	100	100	Boom II
Boom III	92	92	92	92	92	92	92	92	92	100	100	100	Boom III
Boom IV	92	92	92	92	92	92	92	92	92	100	100	100	Boom IV
Boom V	92	92	92	92	92	92	92	92	92	100	100	100	Boom V
Boom VI	46	46	46	92	92	92	92	92	92	100	100	100	Boom VI
Boom VII	46	46	46	46	46	46	92	92	92	100	100	100	Boom VII



38

SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Load Chart - Fixed Jib

Unit: t



Radius (m)	31.8			35.5			39.5			43.4			47.4			Radius (m)
	15.5			15.5			15.5			15.5			15.5			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
6.0	5.8															6.0
6.5	5.7															6.5
7.0	5.6			5.3												7.0
8.0	5.5			5.3			5.1			4.9						8.0
9.0	5.4			5.2			5.0			4.8			4.9			9.0
10.0	5.2	4.2		5.0			4.9			4.6			4.8			10.0
11.0	5.0	4.2		4.8	4.0		4.8	4.0		4.5			4.8			11.0
12.0	4.8	4.0		4.6	3.9		4.6	4.0		4.4	3.9		4.6			12.0
14.0	4.6	3.9	3.5	4.4	3.8	3.4	4.5	3.9		4.2	3.8		4.5	3.9		14.0
16.0	4.4	3.8	3.4	4.3	3.7	3.3	4.3	3.8	3.4	4.1	3.7	3.3	4.4	3.8	3.3	16.0
18.0	4.2	3.7	3.3	4.1	3.6	3.3	4.2	3.7	3.3	4.0	3.6	3.3	4.2	3.7	3.3	18.0
20.0	4.0	3.6	3.3	4.0	3.5	3.2	4.0	3.6	3.3	3.9	3.5	3.2	4.1	3.6	3.2	20.0
22.0	3.9	3.5	3.2	3.8	3.5	3.2	3.9	3.5	3.2	3.8	3.5	3.2	4.0	3.6	3.2	22.0
24.0	3.8	3.4	3.2	3.7	3.4	3.2	3.8	3.4	3.2	3.7	3.4	3.2	3.9	3.5	3.2	24.0
26.0	3.6	3.4	3.2	3.6	3.3	3.2	3.7	3.4	3.2	3.7	3.3	3.2	3.8	3.4	3.2	26.0
28.0	3.5	3.3	3.2	3.4	3.3	3.2	3.6	3.3	3.2	3.6	3.3	3.2	3.7	3.4	3.2	28.0
30.0	3.3	3.3	3.2	3.3	3.3	3.2	3.5	3.3	3.2	3.5	3.3	3.1	3.6	3.3	3.1	30.0
32.0	3.1	3.2	3.2	3.2	3.2	3.2	3.4	3.3	3.2	3.4	3.2	3.1	3.5	3.3	3.1	32.0
34.0	3.0	3.2	3.2	3.0	3.2	3.2	3.3	3.2	3.2	3.3	3.2	3.1	3.4	3.2	3.1	34.0
36.0	2.8	3.1	3.2	2.9	3.1	3.2	3.2	3.2	3.2	3.2	3.2	3.1	3.3	3.2	3.1	36.0
38.0	2.7	3.0	3.1	2.8	3.1	3.1	3.0	3.1	3.2	3.1	3.1	3.1	3.2	3.2	3.1	38.0
40.0	2.6	2.8	3.1	2.7	2.9	2.8	2.9	3.0	3.1	3.0	3.0	3.1	3.1	3.2	3.1	40.0
42.0	2.5	2.6		2.5	2.6	2.5	2.8	2.8	2.9	2.9	2.9	3.0	3.0	3.1	3.1	42.0
44.0				2.1	2.2	2.2	2.7	2.5	2.7	2.7	2.7	2.8	2.9	2.9	2.9	44.0
46.0				1.7	1.8	1.9	2.4	2.3	2.4	2.5	2.5	2.6	2.6	2.6	2.6	46.0
48.0				1.3	1.4		2.1	2.1	2.2	2.2	2.3	2.4	2.4	2.4	2.4	48.0
50.0							1.8	1.9	2.0	2.0	2.0	2.1	2.0	2.2	2.2	50.0
52.0							1.5	1.7		1.8	1.8	1.9	1.7	1.9	2.0	52.0
54.0										1.5	1.6	1.7	1.4	1.6	1.7	54.0
56.0										1.3	1.3		1.1	1.3	1.3	56.0
58.0													0.9	1.0	1.0	58.0
60.0													0.7	0.7		60.0
62.0																62.0
64.0																64.0
66.0																66.0
Boom II	46	46	46	46	46	46	92	92	92	92	92	92	92	92	92	Boom II
Boom III	46	46	46	46	46	46	46	46	46	92	92	92	92	92	92	Boom III
Boom IV	46	46	46	46	46	46	46	46	46	46	46	46	92	92	92	Boom IV
Boom V	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46	Boom V
Boom VI	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46	Boom VI
Boom VII	0	0	0	46	46	46	46	46	46	46	46	46	46	46	46	Boom VII

Quality Changes the World



Load Chart - Fixed Jib

Unit: t



Radius (m)	51.3			55.2			58.9			63.0			Radius (m)
	15.5			15.5			15.5			15.5			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
6.0													6.0
6.5													6.5
7.0													7.0
8.0													8.0
9.0													9.0
10.0	3.9			3.9									10.0
11.0	3.8			3.8			3.9						11.0
12.0	3.8			3.8			3.8			3.5			12.0
14.0	3.8	3.7		3.7	3.5		3.8			3.5			14.0
16.0	3.7	3.6		3.7	3.4		3.7	3.5		3.4	3.2		16.0
18.0	3.6	3.6	3.2	3.6	3.4	3.1	3.7	3.4	3.2	3.4	3.2		18.0
20.0	3.6	3.5	3.2	3.6	3.3	3.1	3.6	3.4	3.1	3.4	3.2	3.1	20.0
22.0	3.5	3.5	3.2	3.5	3.3	3.1	3.6	3.4	3.1	3.4	3.2	3.1	22.0
24.0	3.5	3.4	3.2	3.5	3.3	3.1	3.5	3.3	3.1	3.3	3.1	3.1	24.0
26.0	3.4	3.3	3.1	3.4	3.2	3.1	3.5	3.3	3.1	3.3	3.1	3.1	26.0
28.0	3.4	3.3	3.1	3.4	3.2	3.1	3.4	3.2	3.1	3.2	3.1	3.1	28.0
30.0	3.3	3.3	3.1	3.3	3.2	3.1	3.4	3.2	3.1	3.2	3.1	3.1	30.0
32.0	3.3	3.2	3.1	3.3	3.1	3.1	3.3	3.2	3.1	3.2	3.1	3.1	32.0
34.0	3.3	3.2	3.1	3.3	3.1	3.1	3.3	3.2	3.1	3.1	3.0	3.1	34.0
36.0	3.2	3.2	3.1	3.2	3.1	3.1	3.3	3.1	3.1	3.1	3.0	3.1	36.0
38.0	3.1	3.2	3.1	3.1	3.0	3.0	3.2	3.1	3.1	3.0	3.0	3.0	38.0
40.0	3.0	3.1	3.1	3.0	2.9	2.9	3.1	3.1	3.1	3.0	2.9	3.0	40.0
42.0	2.8	3.1	3.1	2.8	2.8	2.7	3.0	3.0	3.1	2.8	2.8	2.9	42.0
44.0	2.7	2.8	2.8	2.6	2.6	2.6	2.9	2.9	2.9	2.6	2.6	2.7	44.0
46.0	2.5	2.5	2.6	2.4	2.4	2.4	2.6	2.7	2.8	2.4	2.4	2.4	46.0
48.0	2.2	2.3	2.3	2.1	2.2	2.2	2.4	2.5	2.6	2.2	2.2	2.3	48.0
50.0	2.0	2.0	2.1	1.9	2.0	2.0	2.1	2.3	2.4	2.0	2.1	2.1	50.0
52.0	1.7	1.8	1.9	1.7	1.8	1.8	2.0	2.0	2.1	1.7	1.9	1.9	52.0
54.0	1.4	1.6	1.7	1.5	1.6	1.6	1.7	1.9	1.9	1.6	1.6	1.8	54.0
56.0	1.2	1.3	1.4	1.2	1.4	1.4	1.4	1.6	1.7	1.3	1.5	1.5	56.0
58.0	0.9	1.1	1.1	1.0	1.2	1.2	1.1	1.3	1.5	1.1	1.3	1.4	58.0
60.0	0.7	0.8	0.8	0.8	0.9	1.0	0.9	1.1	1.2	0.8	1.0	1.2	60.0
62.0	0.5	0.6	0.6	0.6	0.7	0.7	0.7	0.8	0.9	0.6	0.8	0.9	62.0
64.0						0.5	0.5	0.6	0.7		0.6	0.7	64.0
66.0									0.5			0.4	66.0
Boom II	92	92	92	92	92	92	92	92	92	100	100	100	Boom II
Boom III	92	92	92	92	92	92	92	92	92	100	100	100	Boom III
Boom IV	92	92	92	92	92	92	92	92	92	100	100	100	Boom IV
Boom V	92	92	92	92	92	92	92	92	92	100	100	100	Boom V
Boom VI	46	46	46	92	92	92	92	92	92	100	100	100	Boom VI
Boom VII	46	46	46	46	46	46	92	92	92	100	100	100	Boom VII

Quality Changes the World




40 SAC1100S All-terrain Crane
110 Tons Lifting Capacity

Technical Specifications

Load Chart - Fixed Jib

Unit: t




Radius (m)	47.4			51.3			55.2			58.9			63.0			Radius (m)
	9.4+6			9.4+6			9.4+6			9.4+6			9.4+6			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
9.0	6.0															9.0
10.0	6.0			5.3			4.5									10.0
11.0	6.0			5.3			4.5			4.6						11.0
12.0	6.0			5.3			4.5			4.6			3.9			12.0
14.0	5.9	5.7		5.3	5.3		4.5	4.5		4.6			3.9			14.0
16.0	5.8	5.5	5.1	5.3	5.2		4.5	4.5		4.6	4.6		3.9	3.9		16.0
18.0	5.6	5.2	4.9	5.2	5.0	4.7	4.5	4.5	4.3	4.6	4.6	4.4	3.9	3.9		18.0
20.0	5.4	4.9	4.7	5.1	4.8	4.5	4.5	4.3	4.2	4.6	4.5	4.3	3.9	3.9	3.8	20.0
22.0	5.1	4.7	4.4	4.9	4.6	4.3	4.4	4.2	4.1	4.5	4.4	4.2	3.9	3.9	3.8	22.0
24.0	4.9	4.5	4.3	4.7	4.4	4.2	4.3	4.1	3.9	4.4	4.2	4.1	3.8	3.8	3.8	24.0
26.0	4.6	4.3	4.1	4.5	4.2	4.0	4.1	3.9	3.8	4.3	4.1	3.9	3.8	3.7	3.7	26.0
28.0	4.4	4.1	3.9	4.3	4.1	3.9	3.9	3.8	3.7	4.2	3.9	3.8	3.7	3.6	3.6	28.0
30.0	4.1	3.9	3.8	4.1	3.9	3.8	3.8	3.7	3.6	4.0	3.8	3.7	3.6	3.5	3.5	30.0
32.0	3.9	3.8	3.7	3.9	3.8	3.7	3.6	3.5	3.5	3.8	3.7	3.6	3.5	3.4	3.4	32.0
34.0	3.7	3.7	3.6	3.7	3.7	3.6	3.5	3.4	3.4	3.7	3.6	3.5	3.3	3.3	3.3	34.0
36.0	3.5	3.5	3.5	3.5	3.5	3.5	3.3	3.3	3.3	3.5	3.5	3.4	3.2	3.2	3.2	36.0
38.0	3.2	3.3	3.3	3.3	3.3	3.3	3.1	3.1	3.1	3.3	3.4	3.3	3.0	3.0	3.0	38.0
40.0	2.9	3.0	3.1	3.0	3.0	3.0	2.8	2.8	2.8	3.1	3.1	3.1	2.7	2.8	2.8	40.0
42.0	2.7	2.7	2.8	2.7	2.7	2.7	2.5	2.5	2.5	2.8	2.9	2.9	2.4	2.5	2.6	42.0
44.0	2.4	2.4	2.6	2.4	2.5	2.5	2.3	2.3	2.3	2.5	2.7	2.7	2.2	2.3	2.3	44.0
46.0	2.2	2.2	2.3	2.1	2.2	2.2	2.0	2.0	2.0	2.3	2.4	2.5	2.0	2.1	2.1	46.0
48.0	1.9	1.9	2.0	1.9	1.9	2.0	1.8	1.8	1.8	2.0	2.2	2.2	1.8	1.9	1.9	48.0
50.0	1.7	1.7	1.8	1.7	1.7	1.7	1.6	1.6	1.7	1.8	1.9	2.0	1.6	1.7	1.8	50.0
52.0	1.4	1.5	1.6	1.4	1.5	1.5	1.4	1.4	1.4	1.5	1.7	1.8	1.4	1.5	1.6	52.0
54.0	1.1	1.3	1.4	1.1	1.3	1.3	1.1	1.2	1.3	1.2	1.5	1.6	1.2	1.3	1.4	54.0
56.0	0.8	1.0	1.0	0.8	1.0	1.1	0.9	1.0	1.1	0.9	1.3	1.4	1.1	1.1	1.2	56.0
58.0	0.6	0.7	0.7	0.6	0.7	0.8	0.7	0.9	0.9	0.7	1.0	1.2	0.8	1.0	1.1	58.0
60.0					0.5	0.5	0.5	0.6	0.7	0.5	0.8	0.9	0.6	0.7	0.9	60.0
62.0											0.5	0.6		0.5	0.6	62.0
Boom II	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom II
Boom III	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom III
Boom IV	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom IV
Boom V	46	46	46	92	92	92	92	92	92	92	92	92	100	100	100	Boom V
Boom VI	46	46	46	46	46	46	92	92	92	92	92	92	100	100	100	Boom VI
Boom VII	46	46	46	46	46	46	46	46	46	92	92	92	100	100	100	Boom VII

Quality Changes the World



Load Chart - Fixed Jib

Unit: t



Radius (m)	47.4			51.3			55.2			58.9			63.0			Radius (m)
	15.5+6			15.5+6			15.5+6			15.5+6			15.5+6			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
10.0	3.8															10.0
11.0	3.8			3.4			3.1									11.0
12.0	3.8			3.4			3.1			3.0						12.0
14.0	3.7			3.4			3.1			3.0			2.6			14.0
16.0	3.7	3.4		3.4	3.3		3.1			3.0			2.6			16.0
18.0	3.7	3.4		3.4	3.3		3.1	2.9		3.0	2.9		2.6	2.5		18.0
20.0	3.6	3.4	3.1	3.4	3.3		3.1	2.9		3.0	2.9		2.6	2.5		20.0
22.0	3.5	3.4	3.1	3.4	3.3	2.9	3.0	2.9	2.7	3.0	2.9	2.7	2.6	2.5		22.0
24.0	3.5	3.2	3.1	3.3	3.2	2.9	3.0	2.9	2.7	3.0	2.9	2.7	2.6	2.5	2.4	24.0
26.0	3.4	3.1	3.0	3.3	3.1	2.9	3.0	2.9	2.7	3.0	2.9	2.7	2.6	2.5	2.4	26.0
28.0	3.2	3.0	2.9	3.2	3.0	2.8	2.9	2.8	2.7	3.0	2.9	2.7	2.6	2.5	2.4	28.0
30.0	3.1	2.9	2.8	3.1	2.9	2.8	2.9	2.7	2.6	2.9	2.8	2.6	2.6	2.5	2.4	30.0
32.0	3.0	2.8	2.7	3.0	2.8	2.7	2.8	2.6	2.5	2.9	2.7	2.6	2.6	2.5	2.4	32.0
34.0	2.9	2.7	2.6	2.9	2.7	2.6	2.7	2.5	2.5	2.8	2.6	2.5	2.5	2.4	2.4	34.0
36.0	2.8	2.6	2.5	2.8	2.6	2.5	2.6	2.5	2.4	2.7	2.6	2.5	2.5	2.4	2.3	36.0
38.0	2.7	2.5	2.5	2.7	2.5	2.5	2.5	2.4	2.3	2.6	2.5	2.4	2.4	2.3	2.3	38.0
40.0	2.6	2.4	2.4	2.6	2.4	2.4	2.5	2.3	2.3	2.6	2.4	2.4	2.4	2.3	2.2	40.0
42.0	2.5	2.4	2.3	2.5	2.4	2.3	2.4	2.3	2.2	2.5	2.3	2.3	2.3	2.2	2.2	42.0
44.0	2.4	2.3	2.3	2.4	2.3	2.3	2.3	2.2	2.2	2.4	2.3	2.3	2.3	2.2	2.1	44.0
46.0	2.1	2.2	2.2	2.2	2.2	2.2	2.2	2.1	2.1	2.3	2.2	2.2	2.1	2.1	2.1	46.0
48.0	1.9	2.2	2.2	1.9	2.1	2.1	2.1	2.1	2.1	2.2	2.2	2.2	1.9	2.0	2.0	48.0
50.0	1.7	1.9	2.0	1.7	1.9	1.9	2.0	2.0	2.0	2.0	2.1	2.1	1.8	1.8	1.9	50.0
52.0	1.6	1.8	1.8	1.5	1.7	1.7	1.7	1.9	1.9	1.8	2.0	2.1	1.6	1.7	1.7	52.0
54.0	1.4	1.6	1.6	1.4	1.5	1.5	1.6	1.7	1.8	1.6	1.8	1.9	1.4	1.5	1.6	54.0
56.0	1.2	1.4	1.4	1.2	1.3	1.3	1.4	1.5	1.6	1.4	1.6	1.7	1.2	1.4	1.5	56.0
58.0	1.0	1.2	1.3	1.0	1.1	1.2	1.1	1.3	1.4	1.2	1.4	1.5	1.1	1.2	1.3	58.0
60.0	0.9	1.0	1.1	0.8	1.0	1.0	0.9	1.2	1.2	1.0	1.2	1.3	0.9	1.0	1.2	60.0
62.0	0.7	0.8	0.9	0.6	0.8	0.9	0.7	0.9	1.0	0.8	1.0	1.2	0.7	0.9	1.0	62.0
64.0	0.5	0.6	0.6		0.6	0.7	0.5	0.7	0.8	0.6	0.8	1.0	0.5	0.7	0.9	64.0
66.0								0.5	0.6		0.6	0.7		0.5	0.7	66.0
68.0												0.5			0.5	68.0
Boom II	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom II
Boom III	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom III
Boom IV	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom IV
Boom V	46	46	46	92	92	92	92	92	92	92	92	92	100	100	100	Boom V
Boom VI	46	46	46	46	46	46	92	92	92	92	92	92	100	100	100	Boom VI
Boom VII	46	46	46	46	46	46	46	46	46	92	92	92	100	100	100	Boom VII



42 SAC1100S All-terrain Crane
110 Tons Lifting Capacity
Technical Specifications

Load Chart - Fixed Jib

Unit: t



Radius (m)	47.4			51.3			55.2			58.9			63.0			Radius (m)
	9.4+12			9.4+12			9.4+12			9.4+12			9.4+12			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
10.0	4.0															10.0
11.0	4.0			3.6			3.1									11.0
12.0	4.0			3.6			3.1			3.1						12.0
14.0	4.0			3.6			3.1			3.1						14.0
16.0	4.0	3.9		3.6	3.6		3.1			3.1			2.7			16.0
18.0	3.9	3.9		3.5	3.6		3.1	3.1		3.1	3.1		2.7			18.0
20.0	3.9	3.8	3.7	3.5	3.6		3.1	3.1		3.1	3.1		2.7	2.7		20.0
22.0	3.8	3.6	3.5	3.4	3.5	3.4	3.1	3.1	3.1	3.1	3.1	3.1	2.7	2.7		22.0
24.0	3.6	3.5	3.4	3.3	3.4	3.3	3.1	3.1	3.0	3.1	3.1	3.1	2.7	2.7	2.7	24.0
26.0	3.5	3.3	3.2	3.2	3.2	3.1	3.0	3.0	2.9	3.1	3.1	3.0	2.7	2.7	2.7	26.0
28.0	3.3	3.2	3.1	3.1	3.1	3.0	2.9	2.9	2.8	3.0	3.0	2.9	2.7	2.7	2.7	28.0
30.0	3.2	3.0	3.0	3.0	3.0	2.9	2.9	2.8	2.7	3.0	2.9	2.8	2.6	2.6	2.6	30.0
32.0	3.0	2.9	2.8	2.9	2.9	2.8	2.8	2.7	2.6	2.9	2.8	2.7	2.6	2.6	2.5	32.0
34.0	2.9	2.8	2.7	2.8	2.7	2.7	2.7	2.6	2.5	2.8	2.7	2.6	2.6	2.5	2.5	34.0
36.0	2.8	2.7	2.6	2.7	2.6	2.6	2.6	2.5	2.4	2.7	2.6	2.5	2.5	2.4	2.4	36.0
38.0	2.6	2.6	2.5	2.6	2.5	2.5	2.5	2.4	2.4	2.6	2.5	2.5	2.4	2.3	2.3	38.0
40.0	2.5	2.5	2.4	2.5	2.5	2.4	2.4	2.3	2.3	2.5	2.4	2.4	2.3	2.3	2.2	40.0
42.0	2.5	2.4	2.3	2.3	2.4	2.3	2.3	2.2	2.2	2.4	2.3	2.3	2.2	2.2	2.2	42.0
44.0	2.2	2.3	2.3	2.1	2.2	2.2	2.2	2.2	2.2	2.3	2.3	2.2	2.0	2.1	2.1	44.0
46.0	1.9	2.1	2.1	1.8	2.0	2.0	1.9	2.1	2.1	2.1	2.2	2.2	1.8	1.9	2.0	46.0
48.0	1.7	1.8	1.9	1.6	1.8	1.8	1.7	1.9	2.0	1.9	2.0	2.1	1.6	1.7	1.8	48.0
50.0	1.5	1.6	1.7	1.4	1.5	1.6	1.6	1.7	1.8	1.7	1.8	1.9	1.4	1.5	1.6	50.0
52.0	1.3	1.4	1.4	1.2	1.3	1.4	1.3	1.5	1.6	1.5	1.6	1.7	1.3	1.4	1.4	52.0
54.0	1.1	1.2	1.3	1.0	1.1	1.2	1.2	1.3	1.4	1.3	1.4	1.5	1.1	1.2	1.3	54.0
56.0	0.9	1.1	1.1	0.8	1.0	1.0	1.0	1.1	1.2	1.1	1.2	1.3	0.9	1.1	1.1	56.0
58.0	0.8	0.9	0.9	0.7	0.8	0.9	0.8	1.0	1.0	0.9	1.0	1.2	0.8	0.9	1.0	58.0
60.0	0.6	0.7	0.7	0.5	0.6	0.7	0.6	0.8	0.9	0.7	0.9	1.0	0.6	0.7	0.8	60.0
62.0		0.5	0.5		0.5	0.5		0.6	0.7	0.5	0.7	0.8		0.6	0.6	62.0
64.0									0.5			0.7			0.5	64.0
Boom II	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom II
Boom III	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom III
Boom IV	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom IV
Boom V	46	46	46	92	92	92	92	92	92	92	92	92	100	100	100	Boom V
Boom VI	46	46	46	46	46	46	92	92	92	92	92	92	100	100	100	Boom VI
Boom VII	46	46	46	46	46	46	46	46	46	92	92	92	100	100	100	Boom VII

Quality Changes the World



Load Chart - Fixed Jib

Unit: t



Radius (m)	47.4			51.3			55.2			58.9			63.0			Radius (m)
	15.5+12			15.5+12			15.5+12			15.5+12			15.5+12			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
11.0	2.7															11.0
12.0	2.7			2.4			2.1									12.0
14.0	2.7			2.4			2.1			2.1			1.8			14.0
16.0	2.7			2.4			2.1			2.1			1.8			16.0
18.0	2.7	2.7		2.4	2.4		2.1			2.1			1.8			18.0
20.0	2.7	2.7		2.4	2.4		2.1	2.1		2.1	2.1		1.8	1.8		20.0
22.0	2.7	2.7		2.4	2.4		2.1	2.1		2.1	2.1		1.8	1.8		22.0
24.0	2.6	2.6	2.5	2.4	2.4	2.2	2.1	2.1		2.1	2.1		1.8	1.8		24.0
26.0	2.6	2.5	2.5	2.3	2.4	2.2	2.1	2.1	2.0	2.1	2.1	2.0	1.8	1.8	1.8	26.0
28.0	2.5	2.4	2.4	2.3	2.3	2.2	2.0	2.1	2.0	2.1	2.1	2.0	1.8	1.8	1.8	28.0
30.0	2.5	2.3	2.3	2.3	2.2	2.2	2.0	2.1	2.0	2.0	2.1	2.0	1.8	1.8	1.8	30.0
32.0	2.4	2.2	2.2	2.3	2.1	2.1	2.0	2.0	2.0	2.0	2.1	2.0	1.8	1.8	1.8	32.0
34.0	2.3	2.1	2.1	2.2	2.0	2.1	2.0	2.0	1.9	2.0	2.0	1.9	1.8	1.8	1.8	34.0
36.0	2.2	2.1	2.0	2.1	1.9	2.0	1.9	1.9	1.9	2.0	2.0	1.9	1.8	1.8	1.8	36.0
38.0	2.1	2.0	1.9	2.0	1.9	1.9	1.9	1.8	1.8	1.9	1.9	1.8	1.7	1.7	1.7	38.0
40.0	2.0	1.9	1.9	2.0	1.8	1.8	1.8	1.8	1.7	1.9	1.8	1.8	1.7	1.7	1.7	40.0
42.0	1.9	1.8	1.8	1.9	1.7	1.8	1.8	1.7	1.7	1.8	1.8	1.7	1.7	1.6	1.6	42.0
44.0	1.8	1.7	1.7	1.8	1.7	1.7	1.7	1.6	1.6	1.8	1.7	1.6	1.6	1.6	1.6	44.0
46.0	1.7	1.7	1.7	1.7	1.6	1.7	1.6	1.6	1.6	1.7	1.6	1.6	1.6	1.5	1.5	46.0
48.0	1.7	1.6	1.6	1.7	1.6	1.6	1.6	1.5	1.5	1.6	1.6	1.5	1.5	1.5	1.5	48.0
50.0	1.6	1.5	1.5	1.6	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.5	1.5	1.4	1.4	50.0
52.0	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	1.5	1.5	1.4	1.4	1.4	1.4	52.0
54.0	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.5	1.4	1.4	1.3	1.3	1.3	54.0
56.0	1.1	1.2	1.3	1.2	1.4	1.4	1.2	1.3	1.3	1.3	1.4	1.3	1.1	1.2	1.3	56.0
58.0	1.0	1.1	1.1	1.1	1.2	1.3	1.0	1.2	1.3	1.1	1.3	1.3	0.9	1.1	1.2	58.0
60.0	0.8	1.0	1.0	0.9	1.0	1.2	0.9	1.1	1.2	1.0	1.2	1.2	0.8	1.0	1.0	60.0
62.0	0.7	0.8	0.9	0.7	0.9	1.0	0.7	0.9	1.0	0.9	1.0	1.1	0.7	0.8	0.9	62.0
64.0	0.5	0.7	0.7	0.5	0.8	0.9	0.6	0.8	0.8	0.7	0.8	1.0	0.5	0.7	0.8	64.0
66.0		0.5	0.6		0.6	0.7		0.6	0.7	0.5	0.7	0.8		0.5	0.7	66.0
68.0						0.5		0.5	0.6		0.5	0.7			0.5	68.0
70.0												0.5				70.0
Boom II	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom II
Boom III	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom III
Boom IV	92	92	92	92	92	92	92	92	92	92	92	92	100	100	100	Boom IV
Boom V	46	46	46	92	92	92	92	92	92	92	92	92	100	100	100	Boom V
Boom VI	46	46	46	46	46	46	92	92	92	92	92	92	100	100	100	Boom VI
Boom VII	46	46	46	46	46	46	46	46	46	92	92	92	100	100	100	Boom VII





Sany Automobile Hoisting Machinery Co., Ltd.

No.168, Jinzhou Avenue, Jinzhou Development Zone, Changsha, Hunan, China

Postcode: 410600

Service: 0086-400 6098 318

Consulting: 400 8879 318

Email: crd@sany.com.cn

— Authorised Dealer —

Reminder:

For safe and reliable operation of the diesel engines, please fill Grade IV machines with Grade IV diesel and urea solution conforming to related national standards. Please refer to the operating instructions and related standards for details.

Any change in the technical parameters and configuration due to advancement in technology may occur without prior notice. The machine in the figures may include auxiliary equipment. This brochure is for reference only, and goods in kind shall prevail.

Copyright © Sany Heavy Industry. No part of this catalogue may be copied, recorded or used for any purpose without written approval from Sany Heavy Industry.

© Printed in January 2020 in China

www.sanyglobal.com

